

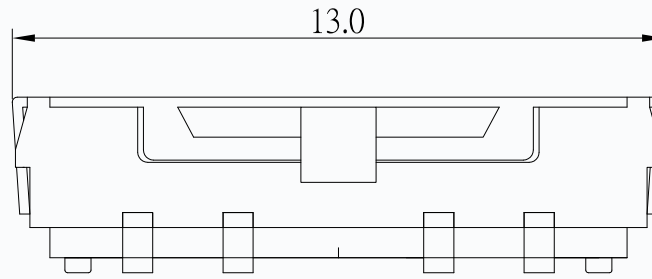
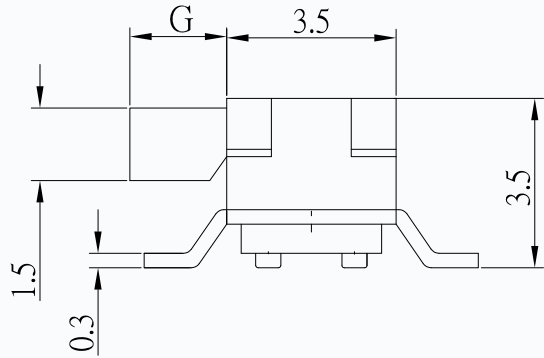




CAD FILE:

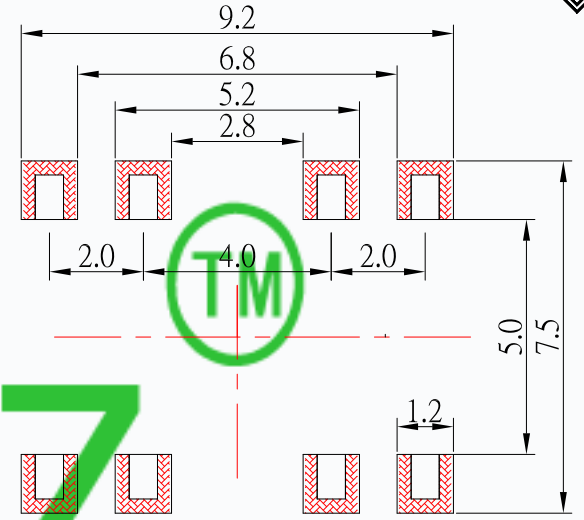

MODEL NO.	KNOB(G)
T1-2310S-G	(2~5)mm



P.C.B LAND PATTERN

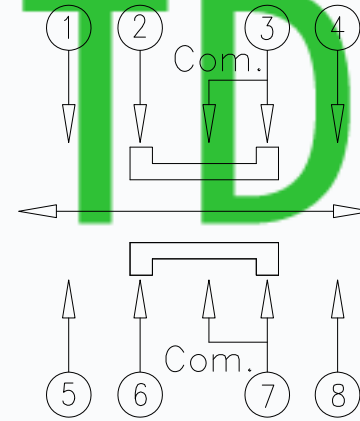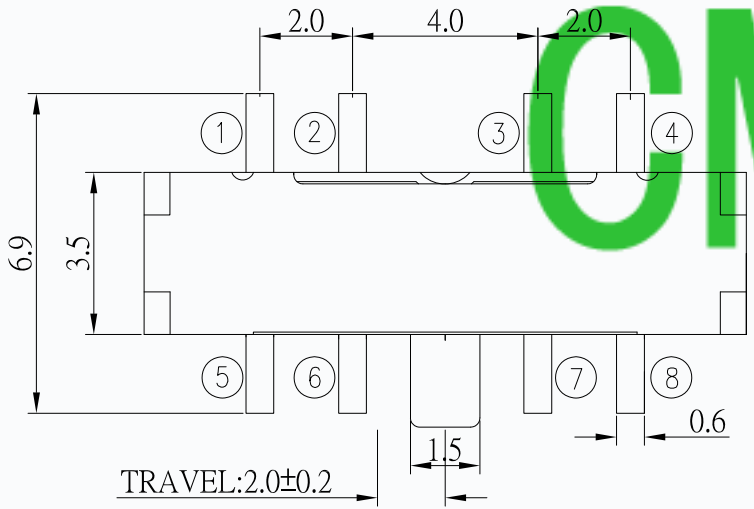

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	> 100 MΩ
Dielectric Withstanding Voltage	500V 0.5mA/min
Contact Resistance	< 70 mΩ
Operating Force	200gf ± 50gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6				
5	CLIP	BECU	2	Ag PLATED
4	TERMINAL	PHOSPHOR BRONZE	8	Ag PLATED
3	CASE	PA46	1	BLACK
2	COVER	SUS	1	NATURE
1	SLIDER	PA46	1	BLACK

TOLERANCE UNLESS SPECIFIED					
WITHIN 1.5mm : ±0.1mm	A	2014-10-5	TIANDU ELECTRONICS		
OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		
TITLE : MINI SLIDE SWITCH		UNIT : mm	DRWG NO.:CMTDDZ-T1-2310S-00		
MODEL: T1-2310S-G		SCALE:3:1	DWN.	ERIC	2014-10-5
CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2014-10-5
			APPD	Coco	2014-10-5