

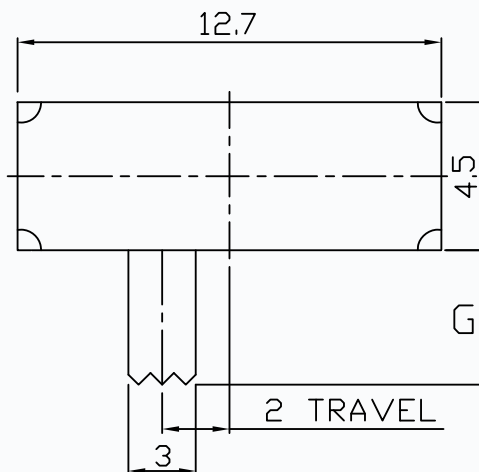




CAD FILE:

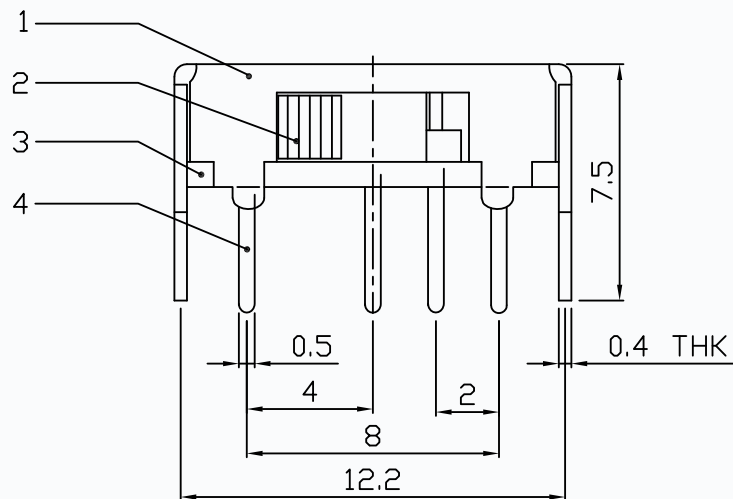

MODEL NO.	KNOB(G/VG)
T3-132001-G	(2~8)mm

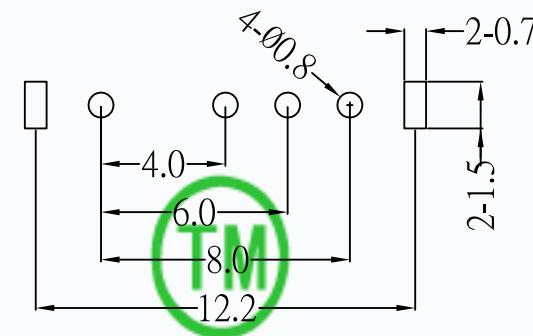

P.C.B. LAYOUT

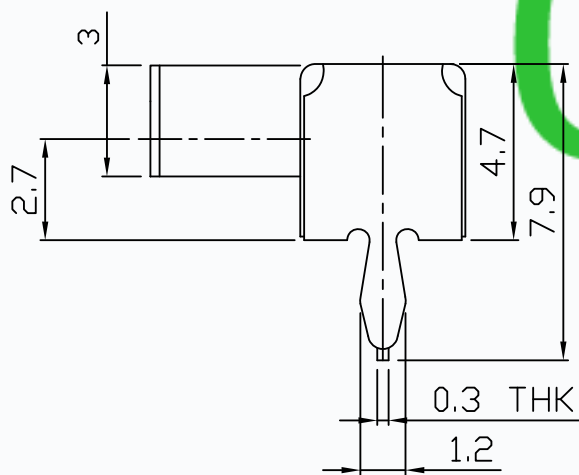

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.3A 50V DC
CIRCUIT	1P3T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6	SPRING PLATE	SUS	1	NATURAL								
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED								
4	TERMINAL	BRASS STRIP	4	Ag PLATED								
3	BASE	PHENOLIC RESIN	1	NATURAL	TITLE : HORIZONTAL SLIDE SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T3-132001-00			
2	KNOB	POM	1	BLACK	MODEL: T3-132001-G		SCALE: 3:1		DWN.	ERIC	2013-6-17	
1	FRAME	STEEL STRIP	1	NI PLATED	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	Coco	2013-6-17	
							DESCRIPTIONS OF REVISION				APPD.	