




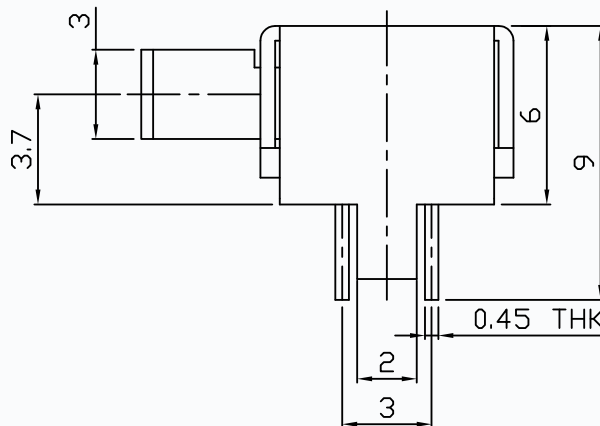



CAD FILE:

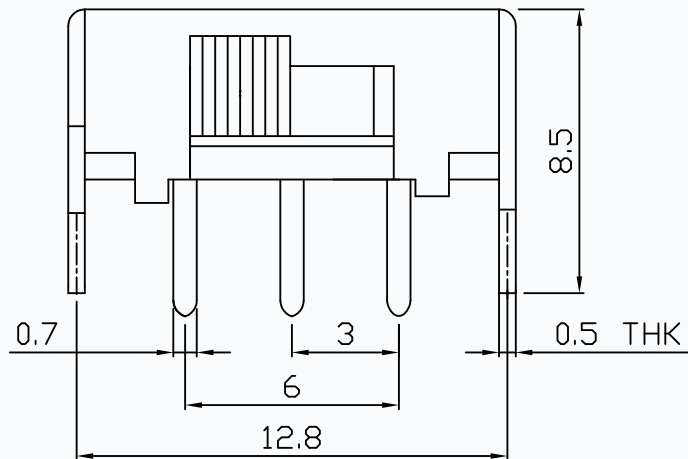

MODEL NO.	KNOB(G/VG)
T4-223014-G	(2~15)mm

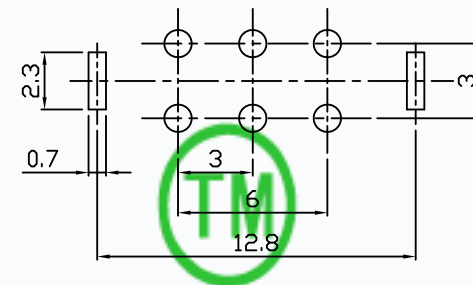

P.C.B. LAYOUT

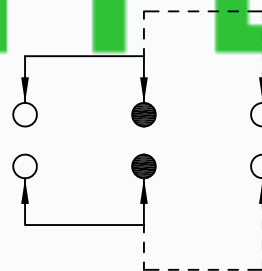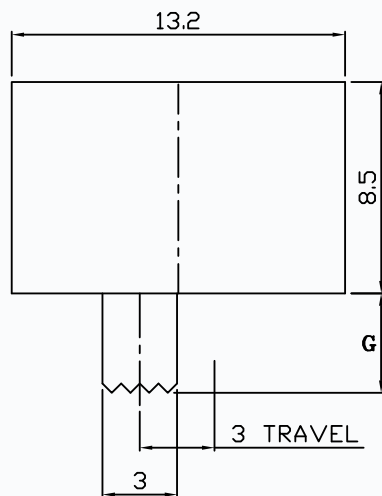

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	2P2T
Timing	NON-SHORTING
Travel	3.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7										
6	SPRING	STEEL WIRE	2	NATURAL						
5	CONTACT	BRASS STRIP	2	Ag PLATED	TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DESCRIPTIONS OF REVISION		APPD.	
4	TERMINAL	BRASS STRIP	6	Ag PLATED			DRWG NO.: CMTDDZ-T3-223014-00			
3	BASE	PHENOLIC RESIN	1	NATURAL			MODEL: T3-223014-G			
2	KNOB	POM	1	BLACK			SCALE: 3:1			
1	FRAME	STEEL STRIP	1	NI PLATED	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.		DWN.	ERIC	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH			CHK'D	MAIKO	2013-6-17	
							APPD.	Coco	2013-6-17	