

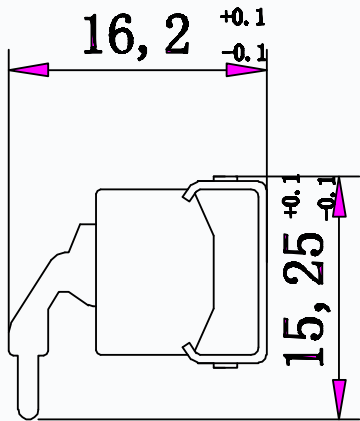




CAD FILE:

MODEL NO.	KNOB(G)
T4-127402-G	0mm

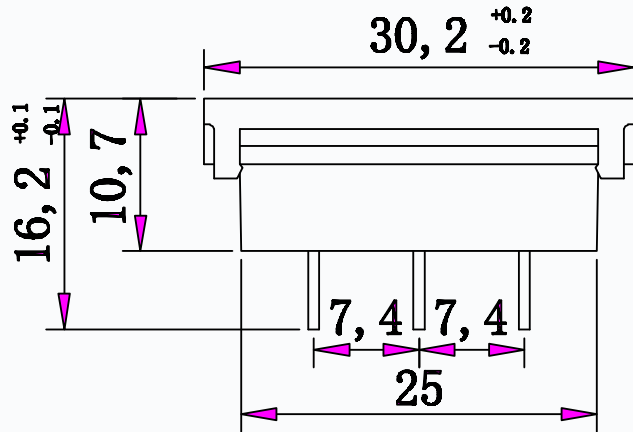

CMTDDZ

P.C.B. LAYOUT

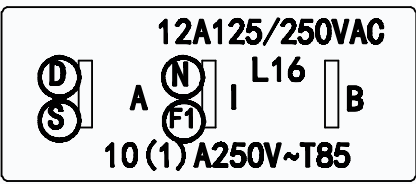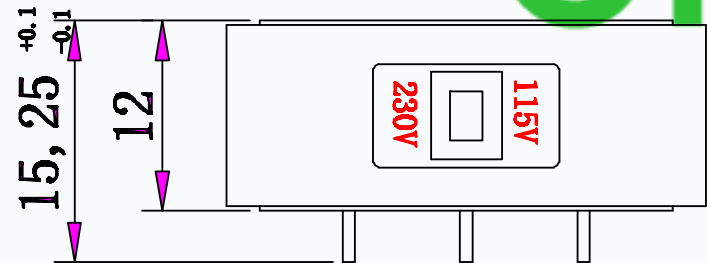

SPECIFICATIONS

Rating	12A 125/250VAC
CIRCUIT	1P2T
Insulation Resistance	> 100 MΩ
Travel	7.4mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

8				
7				
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED
3	BASE	PA66	1	BLACK
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	RED
NO.	PARTS	MATERIALS	Q'TY	FINISH

TOLERANCE UNLESS SPECIFIED		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD		DESCRIPTIONS OF REVISION		APPD.
WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm		TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T4-127402-00	
		MODEL: T4-127402-G		SCALE: 3:1	DWN.	ERIC 2013-6-17
		CMTDDZ 东莞市田都电子有限公司			CHK'D	MAIKO 2013-6-17
		DONGGUAN TIANDU ELECTRONICS CO.,LTD.			APPD.	Coco 2013-6-17