


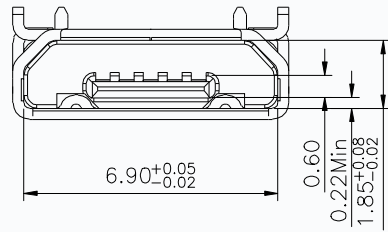
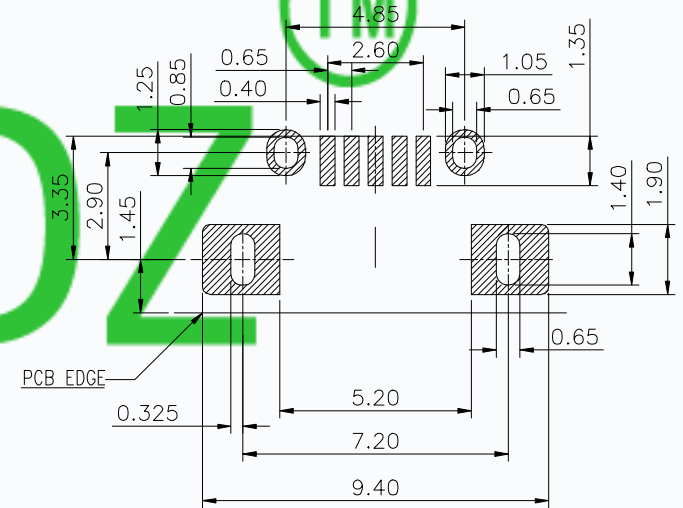
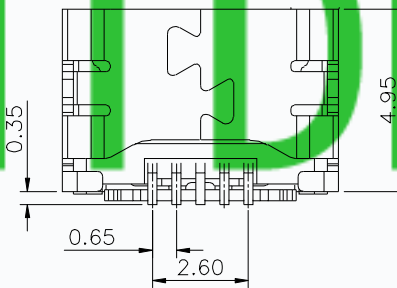


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A1	---	尺寸变更及依实物变更图面	MC	SU	2013.09.13
A2	---	增加铁壳防插爆	MC	SU	2013.12.06
A3	---	产品外观变更	MC	SU	2014.07.09

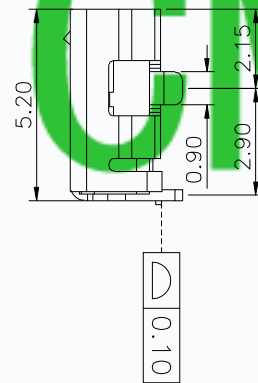

# SPECIFICATION:

- 1 CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
- 2 VOLTAGE: 30 VAC
- 3 TEMPERATURE RANGE: -30 °C ~ 85 °C
- 4 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 5 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
- 6 INSULATION RESISTNACE: 100 MEGOHMS MIN



RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05






TABLE A:

P/N	MATERIAL
T10-05FB09-030	LCP BLACK
T10-05FB09-031	PA10T BLACK

3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1PCS
2	HOUSING	High temperature plastic	BLACK	1SET
1	SHELL	STAINLESS STEEL T=0.30mm	MATTE TIN/Ni Plated	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		
X.X	±0.30	X' ± 2'	PART NO. T10-05FB09-XXX	
.XX	±0.20	.X' ± 1'		
.XXX	±0.10	.XX' ±0.5'		
UNITS	mm	APPD:	DRAWG NO. 05FB09-0300	
MATERILA		CHED:		
FINISH		DRAW:		
			SCALE	SHEET
			1:1	1/1
			REV.	A4

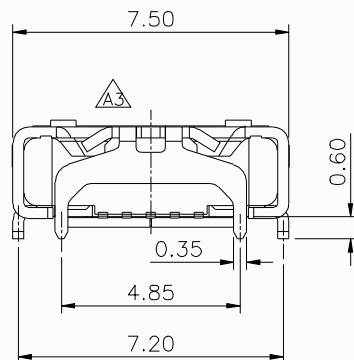

东莞市田都电子有限公司  
DONGGUAN TIANDU ELECTRONICS CO.,LTD

TITLE: MICRO USB 5P SMT TYPE  
内焊全插式平口