


1 2 3 4 5 6 7 8

项目 Mapx	设计内容 Modification	日期 Date	修改人 Draw	核准 Approve
------------	----------------------	------------	-------------	---------------

A
B
C
D
E
F

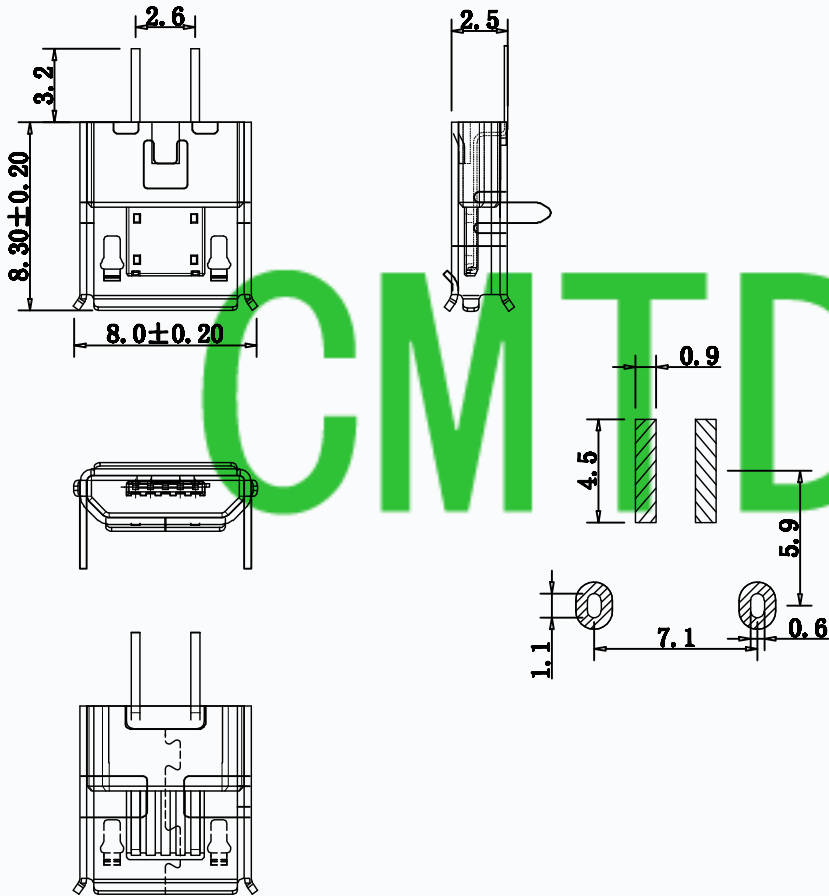

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Ternmaplastics,
- 端子: Contact: Copper Alloy C1591
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area
Tin On Solder Talls

端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

- 外壳: Shell:

铜壳四周镀80U”(MIN)锡

Nickel Plating

成品图 MANUFACTURE DWG		东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD							
公差一览表 TOLERANCE UNLESS OTHERWISE		日期 DATE	2017.6.20	单位 UNIT	MM	制图 DRAWING		MODEL NO.	
.X±0.20	X.±5°	审核 CHECKED		比例 SCALE	1:1	设计 DESIGN	MC	品名 NAME	T10-02FB15
.XX±0.10	.X±2°	核准 APPROVE		画法 VIEW	⊕ ⊖			版本 VER	AO
.XXX±0.02	.XX±1°							页数 SHEET	001

1 2 3 4 5 6 7 8