
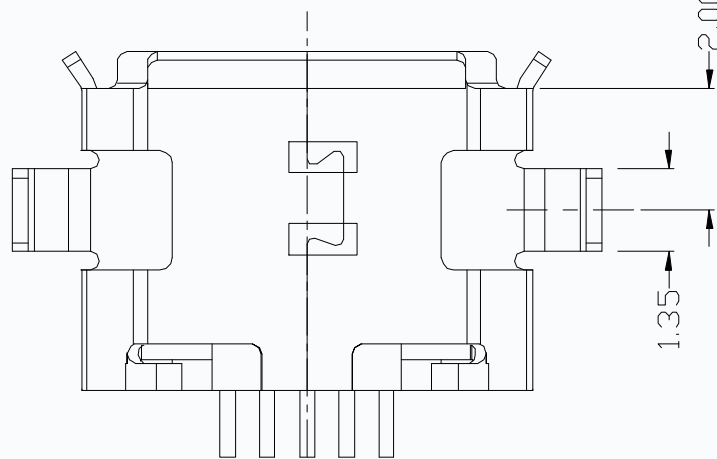




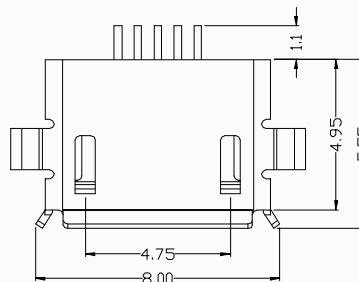


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

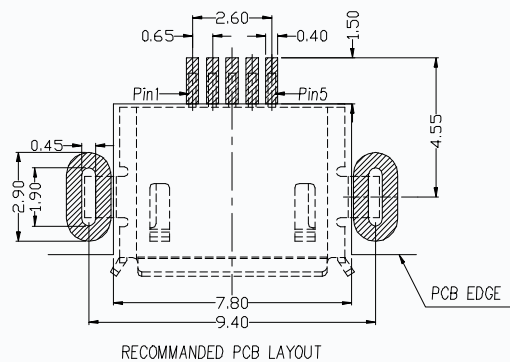

Specifications:

Electrical:

1. Current Rating
1.5A/contact terminal
2. Voltage Rating
30V DC
3. Contact Resistance
30 milliohms MAX
4. Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. Insulation Resistance:
1000MEGA ohms MIN

Mechanical:

1. Connector Mate and Unmate Force
Mate force: 3.75kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. Terminal Retention
1.2kgf (MIN)

Material:

1. Housing:
Hing Temperature Thermoplastics,
U1 94V-0 PBT/LCP White/Black
2. Contact: Copper Alloy C2680
3. Shell: Copper Alloy C2680/SPCC

Finish:

1. Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. Shell:
Nickel Plating

UNITS MM	SCALE 1:1	东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONIC CO.,LTD TEL:0769-8538 4807 FAX:0769-8538 4842			
		DR.	LI	TITLE: MICRO USB 5P B型两脚DIP沉板1.0卷边	
GENERAL TOLERANCE		CHK.	MC	MODEL NO.: T10-05CB09	DWG NO:
X.	±0.30	APPD.	ZHOU	DATE: 2011.06.28	P
X.X	±0.20				PART NO:
X.XX	±0.10				SIZE A4
X.	±3°				
X.X	±2°				