
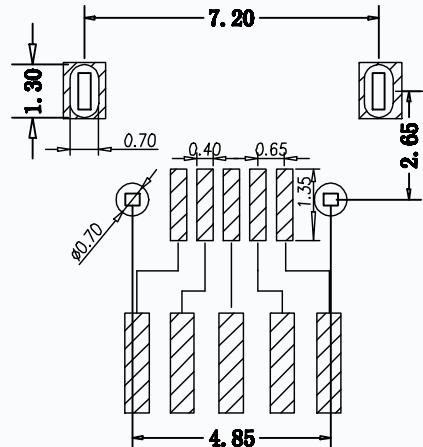



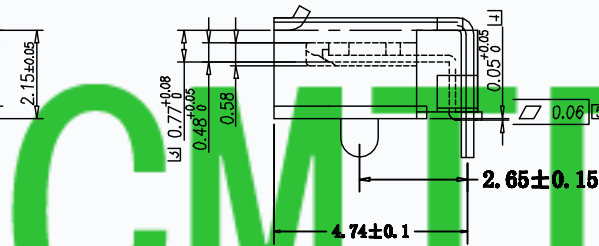
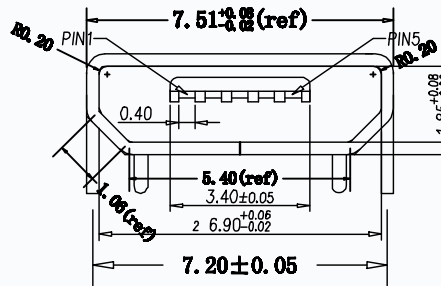

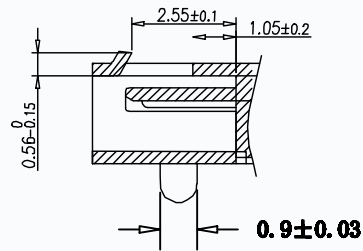


REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE

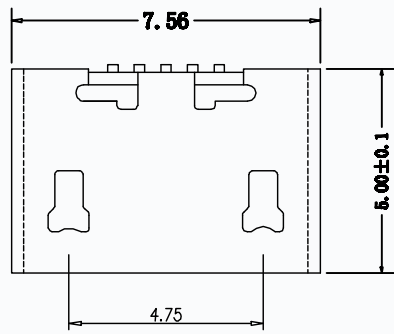

**NOTES:**  
**MATERIAL:**  
 1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC WITH G. F. UL94V-0  
 1.2 CONTACT: COPPER ALLOY T=0.15mm  
 1.3 SHELL: COPPER ALLOY, T=0.30mm  
**2. SPECIFICATION:**  
 2.1 CURRENT RATING: 1 A MAX  
 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min  
 2.3 CONTACT RESISTANCE: 30 mΩ MAX.  
 2.4 INSULATION RESISTANCE: 100 MΩ MIN.  
 2.5 TOTAL MATING FORCE: 3.57 Kgf MAX.  
 2.6 TOTAL UNMATING FORCE: 1.0Kgf MIN. 0.81~2.05 Kgf MIN. AFTER 10000 INSERTION/EXTRACTION CYCLES  
 2.7 TEMPERATURE RANGE: -30°C~+80°C

UNITS mm	SCALE 1:1	REV. X1	SHEET 1 OF 1	<b>东莞市田都电子有限公司</b> DONGGUAN TIANDU ELECTRONICS CO.,LTD <b>TITLE:</b> MIRCO USB 5P B TYPE 四脚全插(牛角型)平口-S	
		DATE 2011-12-08	DR. MC		
<b>GENERAL TOLERANCE</b> 0. ±0.30 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±2°		CHK.	APPD.	<b>MAT'L</b> SEE NOTES	<b>FINISH</b> SEE NOTES
		<b>MODEL NO. p2</b> T10-05FB10		<b>PART NO.</b> CMTD006 USP-720-S04-S	<b>SIZE</b> A4