

1

2





3

4

5

6

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE

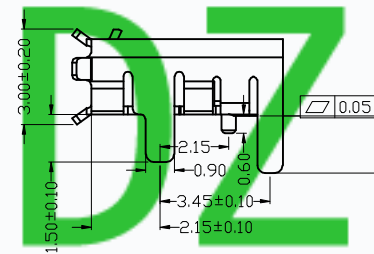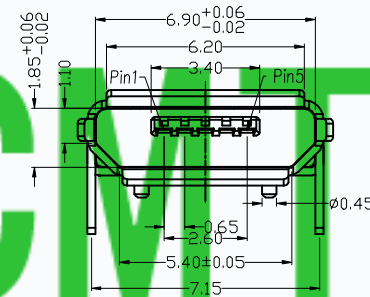

NOTES:

MATERIAL:

1.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC WITH G.F, UL94v-0

1.2 CONTACT: COPPER ALLOY T=0.15mm

1.3 SHELL: COPPER ALLOY, T=0.25mm

2.SPECIFICATION:

2.1 CURRENT RATING: 1 A MAX

2.2 DIELECTRIC WITHSTANDING

VOLTAGE: 100 V(ac) FOR 1min

2.3 CONTACT RESISTANCE: 30 mΩ MAX.



2.4 INSULATION RESISTANCE: 100 MΩ MIN.

2.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

2.6 TOTAL UNMATING FORCE: 1.0Kgf MIN. 0.81~2.05 Kgf

MIN. AFTER 10000 INSERTION/EXTRATION CYCLES

2.7 TEMPERATURE RANGE: -30°C~+80°C

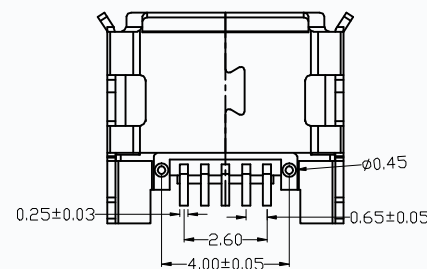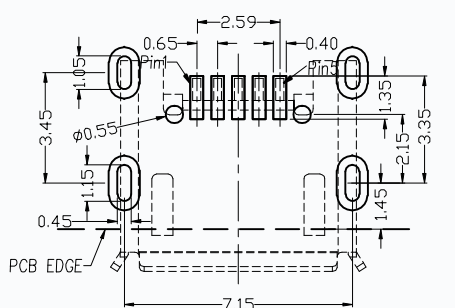

BOM:

項次	料号	名稱	材質	表面	數量
3		外壳	黃銅 (C2680 H), T=0.25±0.03mm	鍍鎳	1
2	DC-005F09-02	胶心	LCP UL 94V-0	黑色	1
1	DC-005F09-01	PIN	黃銅 (C2680 H), T=0.15±0.02mm	鍍前金后錫	5

UNITS mm	SCALE 1:1	REV. X1	SHEET 1 OF 1	东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD TEL:0769-85384807 FAX:0769-85384842	
		DATE 2012-11-16	TITLE: Micro USB 5P/F B 四脚全插 (L=1.80) 有柱 (0.4) 卷边		
GENERAL TOLERANCE		DR. M C	MAT'L SEE NOTES		FINISH SEE NOTES
0. ±0.30 0.0 ±0.20 0.00 ±0.10 0.° ±4° 0.0° ±2°		CHK.	MODEL NO. p2 T10-05FB12	A	PART NO. CMTD-MC-B-05-715-018 SIZE AA
		APPD.			