

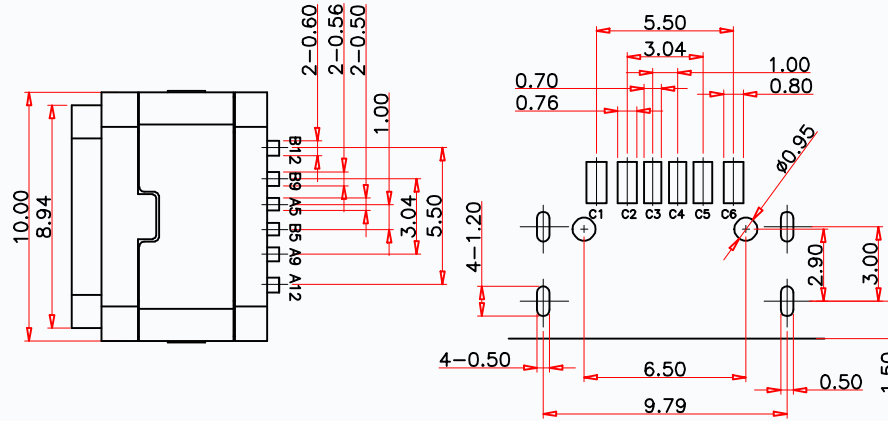


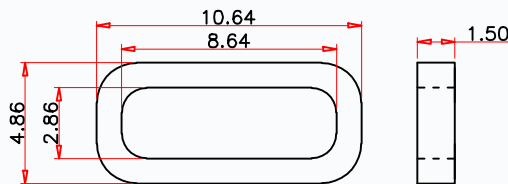



REV.	BRAND	DESCRIPTION	DESIGN	DATE
B	CMTDDZ	NEW		



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

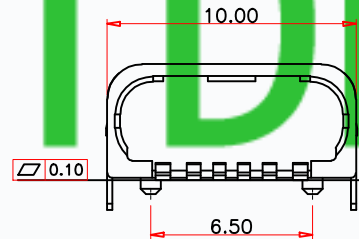

建议的胶圈尺寸




$\phi 0.80$

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

加防水圈示意图

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
X.	± 0.50	X.* ± 2°	东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONIC CO.,LTD	
.X	± 0.30	.X* ± 1°		
.XX	± 0.10	.XX* ± 0.5°		
.XXX	± 0.05	MAT'L	TITLE: USB C F 6P板上四脚插板防水型母座	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD			DWG NO.: T11-06BS08	
FINISH			APPD:	
Q'TY			CHKD:	
			DR:	
				
			SCALE	SHEET
			1/1	1/1
			REV.	A1