
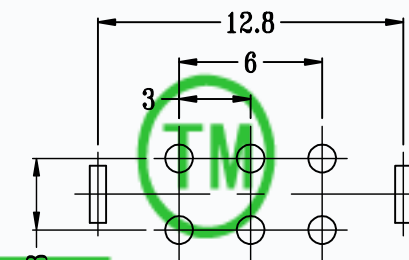
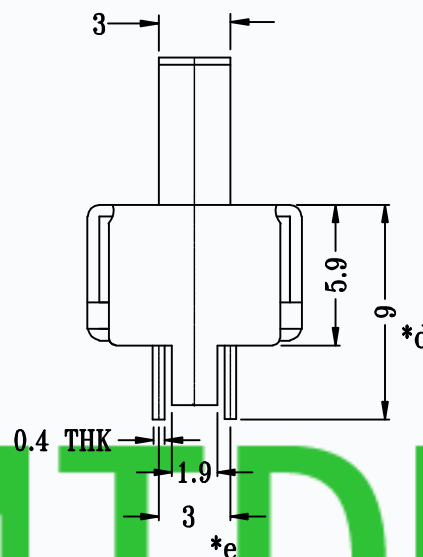
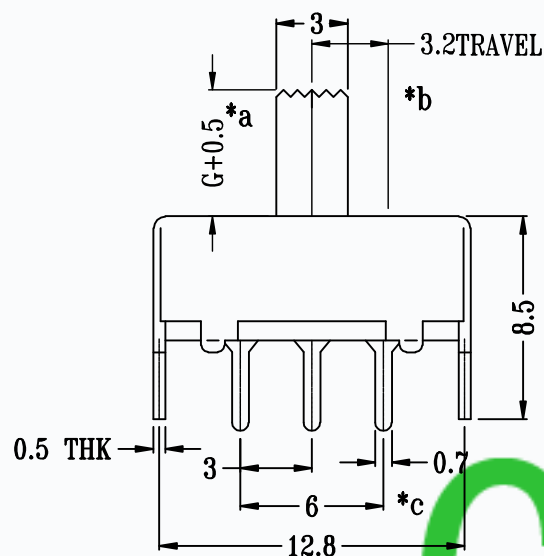
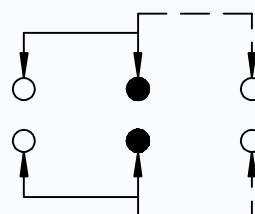


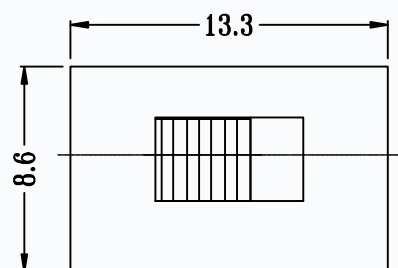

CAD FILE:

MODEL NO.	KNOB(G/VG)
T2-223004-G	(2~15)mm

P.C.B. LAYOUT
BOTTOM VIEW

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	2P2T
Timing	NON-SHORTING
Travel	3.2mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7										
6	SPRING	STEEL STRIP	2	NATURAL						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH MODEL: T2-223004-G CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.	UNIT : mm SCALE: 3:1	DESCRIPTIONS OF REVISION		APPD.	
4	TERMINAL	BRASS STRIP	6	Ag PLATED						
3	BASE	PHENOLIC RESIN	1	NATURAL						
2	FRAME	STEEL STRIP	1	NI PLATED						
1	KNOB	POM	1	BLACK						
NO.	PARTS	MATERIALS	Q'TY	FINISH			DRWG NO.: CMTDDZ-T2-223004-00			
							DWN.	ERIC	2013-6-17	
							CHK'D	MAIKO	2013-6-17	
							APPD.	Coco	2013-6-17	