

REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行		宋亮红	2017-02-24

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATED Min ON CONTACT AREA, 100u"

Min TIN (LEAD FREE) ON SOLDER AREA,

SHELL: SUS304-H, T=0.30±0.03mm

50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N AFTER TEST.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A FOR VBUS;

1.25A FOR GND PIN.

0.25A FOR OTHER.

VOLTAGE: 20 V MAX

WITHSTANDING VOLTAGE: 100V AC R.M.S.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标注者为首样全检, 重点管控尺寸.

6. 产品符合RoHS标准

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

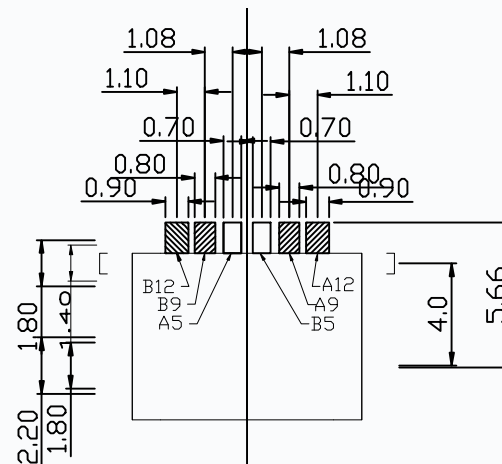
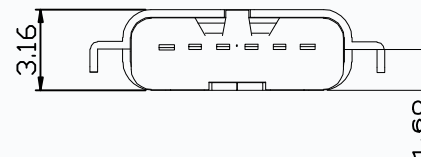

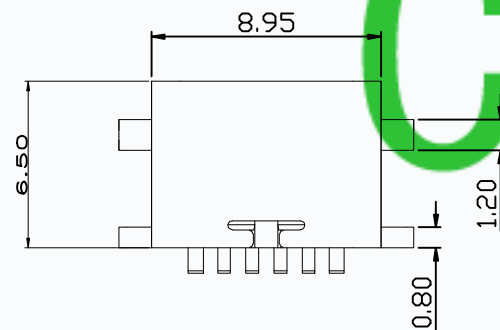

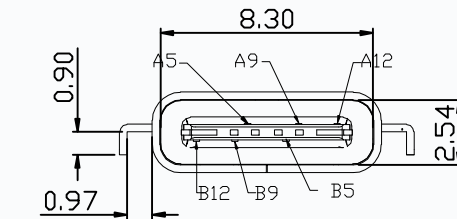


Table:

成品料号	零件名称	零件料号	材料 / 电镀
T11-06CB14	端子		SUS 304 R-H NO PLATING
	塑胶材料		SUS 301 R-H Sn 80~200u"
	外壳		SUS 301 R-H 电镀材料等后.

东莞市田都电子有限公司

DONGGUAN TIANDU ELECTRONICS CO., LTD

.X: ±0.35	.X': ±1.5'	INTENDED USE: CONNECTOR	TITLE: USB TYPE C 6PIN沉板 简易版	
.XX: ±0.25	.XX': ±1.0'		PART NO.:	SEE TABLE
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	DWG. NO.:	T11-06CB14
MAT'L.: SEE NOTES		CHKD.:	SCALE: 1:1	PAGE: 1/1
FINISH:		DR.: Zhang	UNIT: mm	REV.: A0