





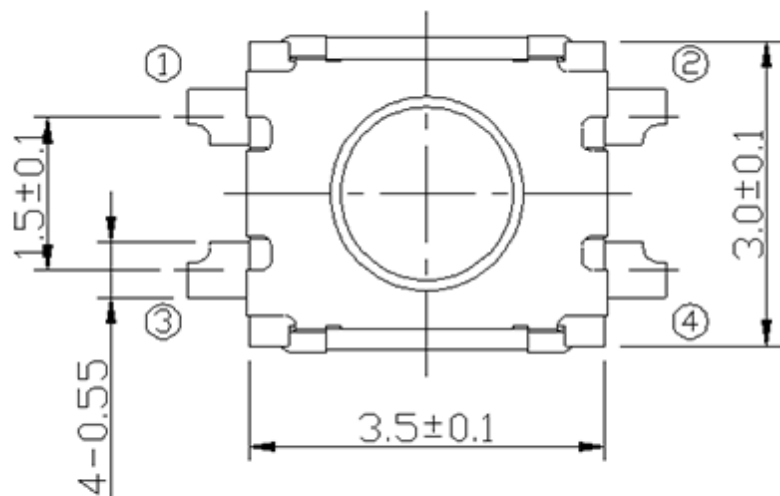



CAD FILE:

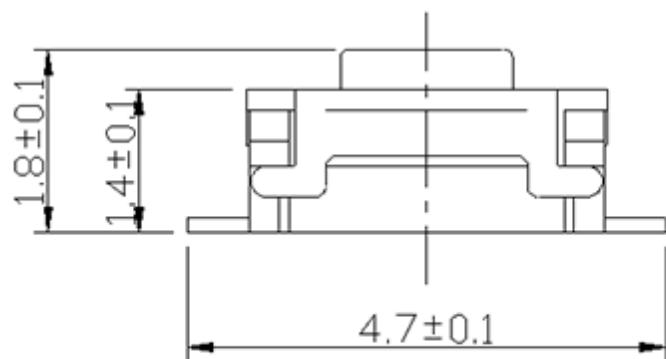

CIRCUIT DIAGRAM

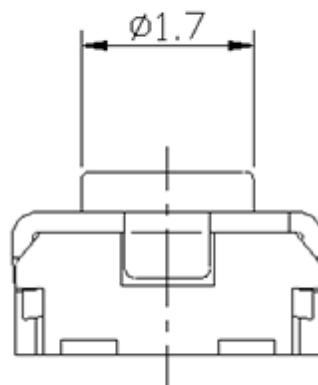

MODEL NO.	XX
T6-3035S-XX	16=160gf
	20=200gf
	40=400gf

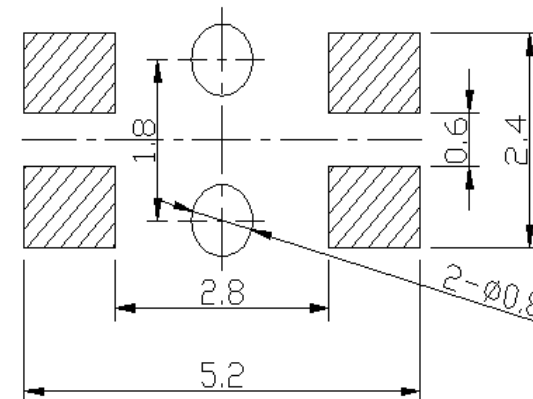

P.C.B LAND DIMENSION

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.12mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	160±50gf/200±50gf/400±80gf
Operating Life	200,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	COVER	SUS	1	PLATING NICKEL			DESCRIPTIONS OF REVISION			APPD.		
4	KEYSTOKE	NYLON	1	BLACK	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-3035S-00		
3	TERMINAL	PHOSPHOR BRONZE	4	PLATING SILVER	MODEL: T6-3035S-XX			SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	2	NATURAL	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.					CHK'D	MAIKO	2013-6-17
1	BASE	NYLON	1	BLACK						APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH								