


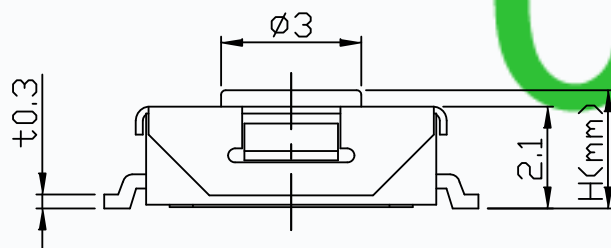
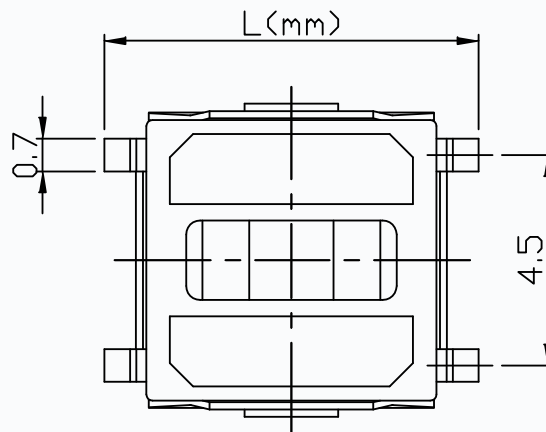
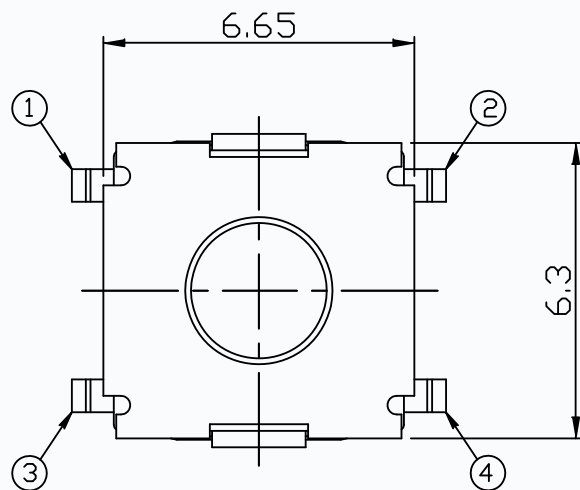


CAD FILE:

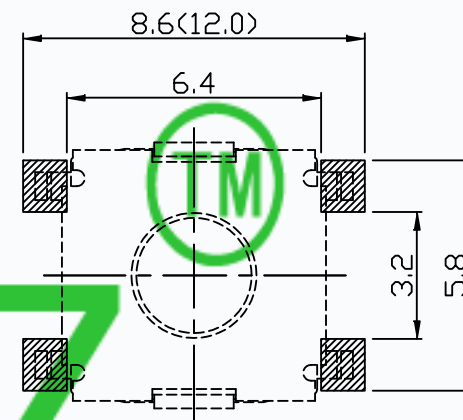

CIRCUIT DIAGRAM

MODEL NO.	XX	H(MM)
T6-6262FS-XX-H	13=130GF	2.5
	16=160GF	2.7
	25=250GF	3.1
		3.7
		4.3
		5.0



P.C.B. LAND PATTERN

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.1mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	130±50/160±50/250±50gf
Operating Life	50,000 Cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD						
7												
6												
5	KNOB	NYLON	1	RED			DESCRIPTIONS OF REVISION			APPD.		
4	COVER	SUS	1	NATURAL	TITLE : TACT SWITCH			UNIT : mm		DRWG NO.: CMTDDZ-T6-6262FS-00		
3	TERMINAL	COPPER(0.3T)	4	PLATING SILVER	MODEL: T6-6262FS-XX-H			SCALE: 3:1		DWN.	ERIC	2013-6-17
2	CONTACT	F.Ag/SUS	1	NATURAL	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D		MAIKO	2013-6-17	
1	BASE	NYLON	1	BLACK				APPD.		Coco	2013-6-17	
NO.	PARTS	MATERIALS	Q'TY	FINISH								