

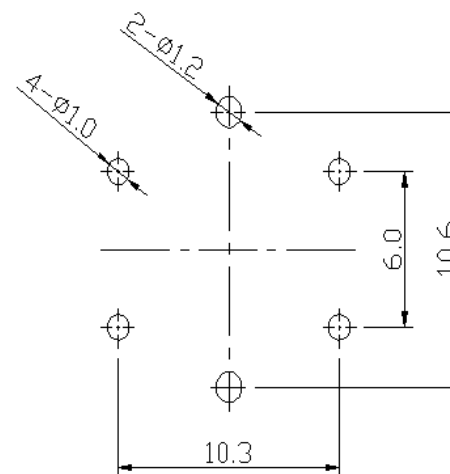


CAD FILE:

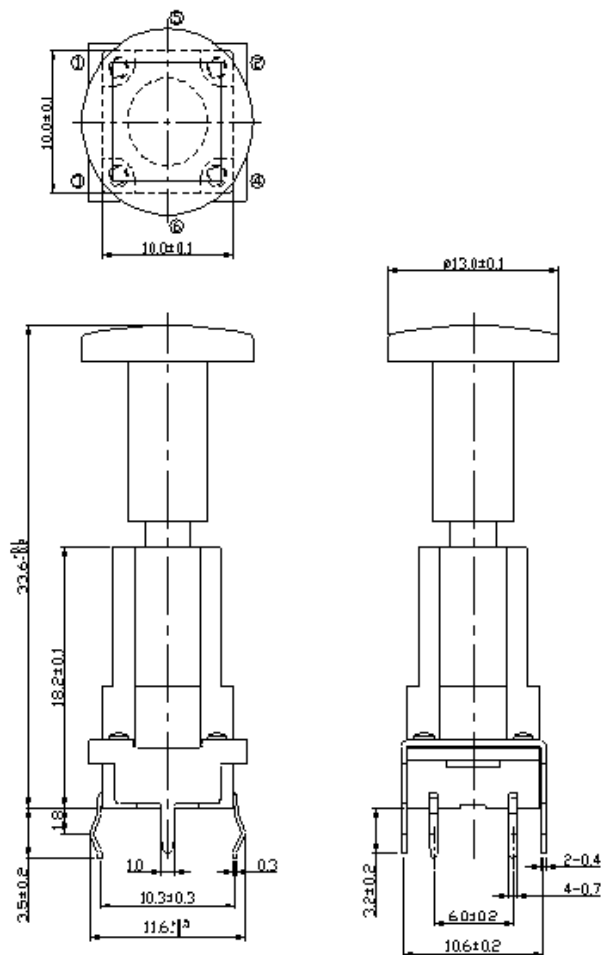

P.C.B LAND DIMENSION



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.4±0.2mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃ (45% ~ 85% RH)
Operating Force	400±100gf
Operating Life	100,000 Cycles
I _p Rating	IP67

9	SUPPORT	SPCC	1	----
8	GUST FILM	PLOYIMIDE TAPE	1	----
7	GASKET	PPA	1	BLACK
6	KNOB	PPA	1	BLACK
5	COVER	PPA	1	BLACK
4	WATERPROOF SILICONE	SILICA GEL	1	BLACK
3	TERMINAL	BRASS	4	SILVERING
2	CONTACT	SUS	1	SILIVER COVERED
1	BASE	PPA	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD	DESCRIPTIONS OF REVISION		APPD.
		TITLE : WATERPROOF SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T6-1010AD-00
MODEL: T6-1010AD	SCALE: 3:1	DWN.	ERIC	2013-6-17
CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.	CHK'D	MAIKO	2013-6-17	
	APPD.	Coco	2013-6-17	