


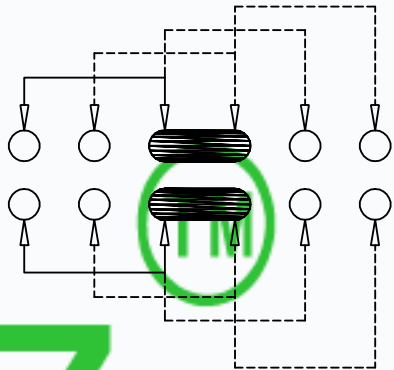


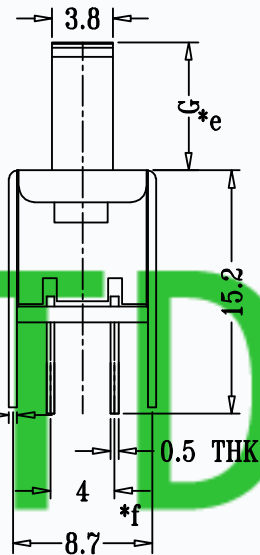

MODEL NO.	KNOB(G/VG)
T2-243001-G	(2~15)mm

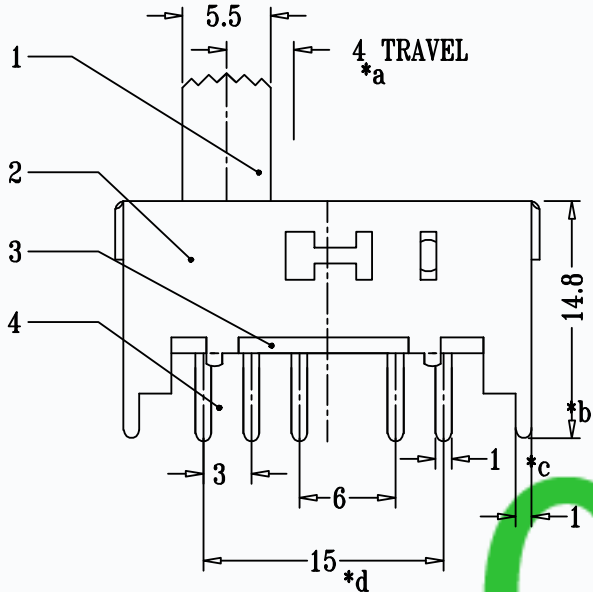

SCHEMATIC (SHORTING)

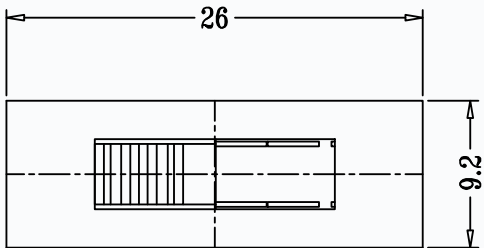

CMTDDZ

SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	2P4T
Timing	SHORTING
Travel	3.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8										
7	STEEL BALL	STEEL	2	NATURAL	TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD	DESCRIPTIONS OF REVISION			APPD.
6	SPRING	STEEL WIRE	1	NATURAL						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T2-243001-00			
4	TERMINAL	BRASS STRIP	10	Ag PLATED	MODEL: T2-243001-G	SCALE: 3:1	DWN.	ERIC	2013-6-17	
3	BASE	PHENOLIC RESIN	1	NATURAL	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.	APPD.	CHK'D	MAIKO	2013-6-17	
2	FRAME	STEEL STRIP	1	BLACK			Coco	2013-6-17		
1	KNOB	POM	1	BLACK						
NO.	PARTS	MATERIALS	Q'TY	FINISH						