

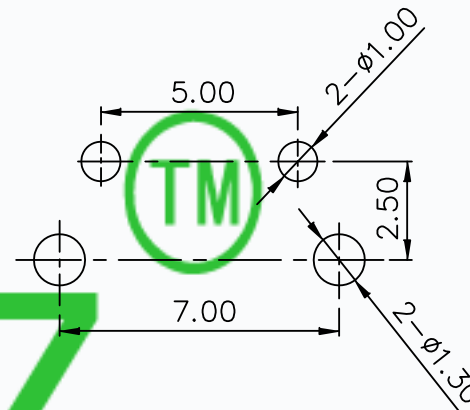
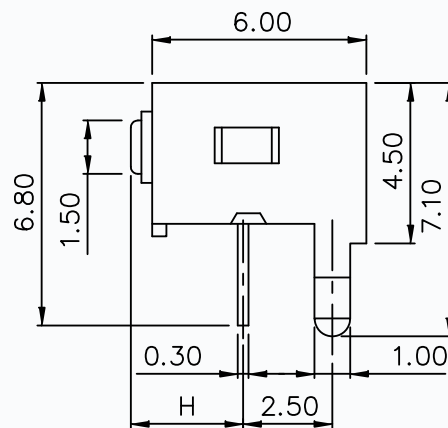
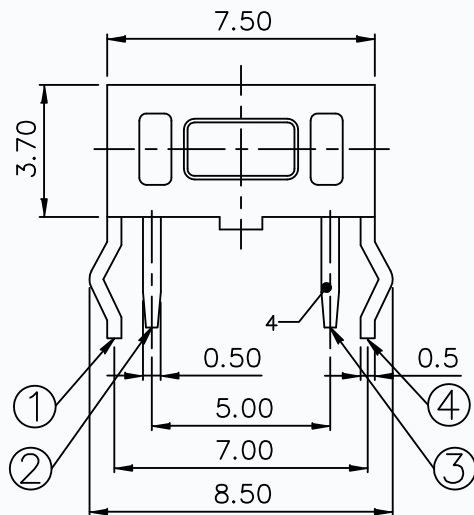


CAD FILE:

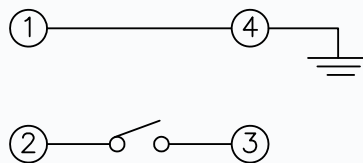

P.C.B. LAND PATTERN

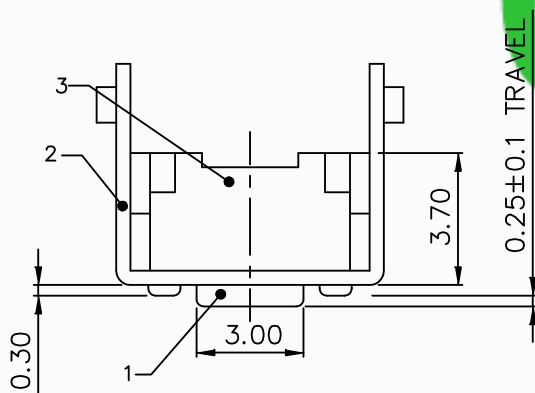

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC
Travel	0.25±0.05mm
Contact Resistance	≤ 100 mΩ
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	125±50/160±50/260±50/320±80/520±130gf
Operating Life	30,000 Cycles for 260/320/520gf 50,000 Cycles for 125/160gf

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7										
6										
5	COVER	SPCC	1	PLATING NICKEL			DESCRIPTIONS OF REVISION			APPD.
4	KEYSTOKE	PA46	1	BLACK/WHITE	TITLE : TACT SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T6-3560AM-00		
3	TERMINAL	BRASS(0.30t)	2	PLATING SILVER						
2	CONTACT	F.Ag/SUS	1	PLATING SILVER	MODEL: T6-3560AM-XX-H		SCALE: 3:1	DWN.	ERIC	2013-6-17
1	BASE	PA46	1	BLACK/WHITE						
NO.	PARTS	MATERIALS	Q'TY	FINISH	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17