
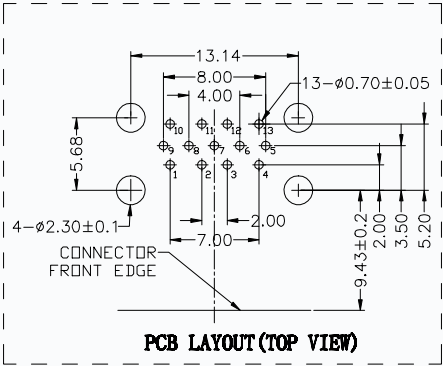


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		NEW	Elaine	—	—	15-12-09
A1	ECN160408001	共用B款端子	H.QIU	BENDEE	BENDEE	16-04-08



SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩ Max for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.
8N Min After Durability

Material:
Housing: PBT+30%GF COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: Brass

Plating:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated

Operating Temperature:-55°to+85°

Pin Define Table:

PIN NO.	1&10	2&11	3&12	4&13	
SIGNAL NAME	VBUS	D-	D+	GND	
PIN NO.	5	6	7	8	9
SIGNAL NAME	StdA_SSRX-	StdA_SSRX+	GND-DRAIN	StdA_SSTX-	StdA_SSTX+

料号备注

T10-3 F 184 D XX T XX XX

12=半金锡10"			
13=半金锡30"			
14=半金锡60"			
15=半金锡160"			
16=半金锡300"			
00=PBT蓝铜壳镀镍	R=ROHS2.0标准		
01=PA9T蓝铁壳镀镍	W=无卤+ROHS2.0	B=盐雾24H	
	H=REACH标准	C=盐雾48H	

东莞市田都电子有限公司
DongGuan TianDu Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名规格	上层2.0+下层3.0 AF双层90度DIP	
X.	+/-	制图 Elaine	2015.12.09	审核	SEE TABLE	
.X	+/-	核准		料号		
.XX	+/-	文件位置		字號		
FRACTIONS	+/-	ANGLE OF PROJECTION		工程圖号:	DWG-USBAF-244	版本 A1
ANGLES	+/-	2.00°		比例	1 : 1	状态码 A
DIMENSIONS		ANGLE OF PROJECTION		页數	1 OF 1	
(METRIC)	(MM)					