
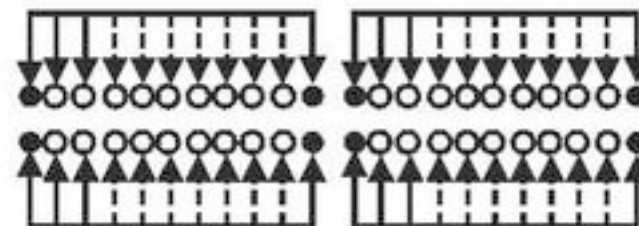


CAD FILE:

MODEL NO.	KNOB(G/VG)
T2-492001-G	(2~15)mm

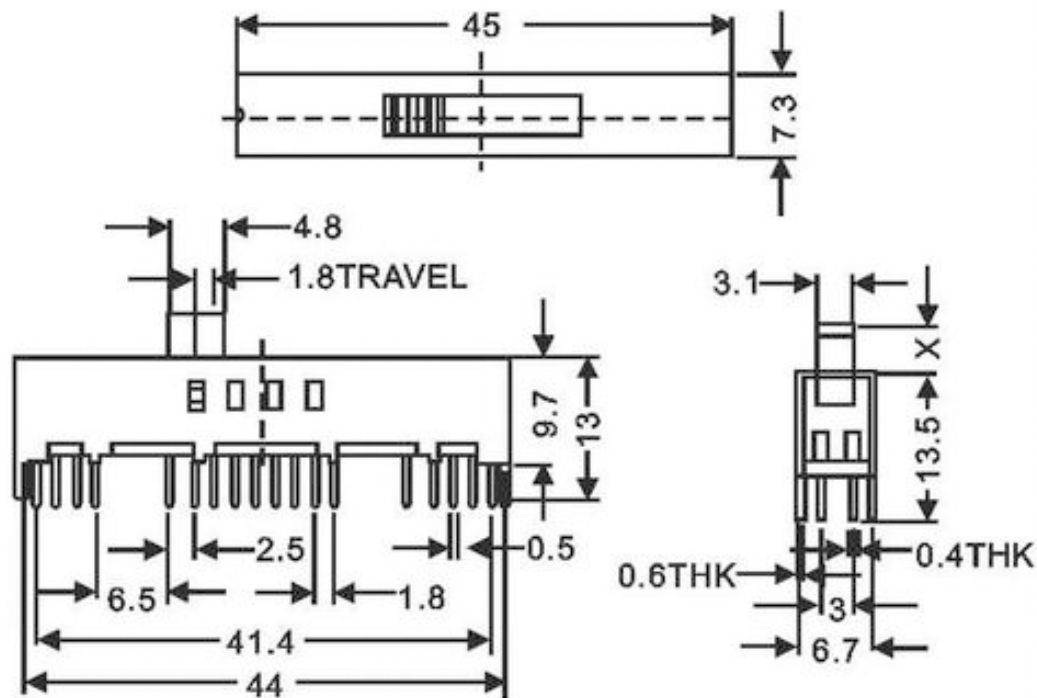

SPECIFICATIONS	
Rating	0.3A 30V DC
CIRCUIT	4P8T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE	DESCRIPTIONS OF REVISION	APPD.
8					UNLESS SPECIFIED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD	
7	SPRING BALL	STELL	2	NATURAL			WITHIN 1.5mm : ±0.1mm
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm : ±0.2mm		
5	CONTACT CLIP	PBS STRIP	4	Ag PLATED			
4	TERMINAL	BRASS STRIP	44	Ag PLATED			
3	BASE	PHENOLIC RESIN	1	NATURAL			
2	KNOB	POM	1	BLACK			
1	FRAME	STEEL STRIP	1	NI PLATED			
					TITLE : VERTICAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T2-492001-00
					MODEL: T2-492001-G	SCALE: 3:1	DWN. ERIC 2013-6-17
					CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.	CHK'D MAIKO	2013-6-17
						APPD. Coco	2013-6-17