

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A1	ECN120509013	新发行	xu dong bin	—	—	2012.05.09
A2	ECN130625003	变更料号	WEI			2013.06.25

SPECIFICATIONS:

Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.


Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts

Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability
 Housing: PBT+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy(T=0.25mm)
 Shell: Brass

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated

operating Temperature:-55°C to +85°C

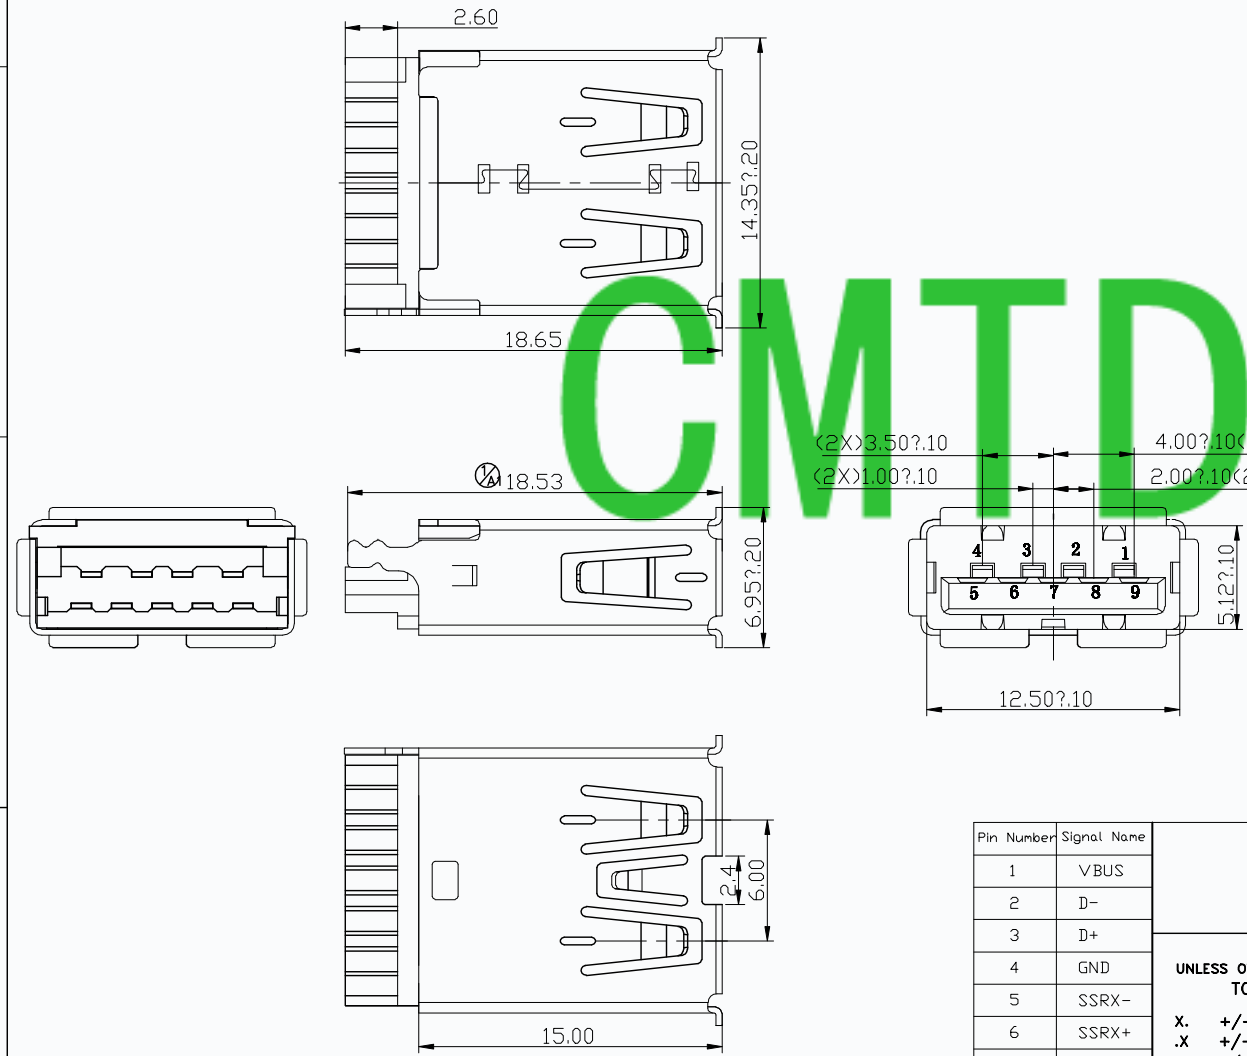

料号备注:
T10-3F006SXXTXXR

- "12"半金穿轴G/F
- "13"半金穿轴3U"
- "14"半金穿轴5U"
- "15"半金穿轴15U"
- "16"半金穿轴30U"

东莞市田都电子有限公司

DongGuan TianDu Electronics Co.,Ltd

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND
8	SSTX-
9	SSTX+
Shell	Shield

UNLESS OTHERWISE SPECIFIED TOLERANCES	
X. +/-	0.30
.X +/-	0.25
.XX +/-	0.25
FRACTIONS +/-	
ANGLES +/-	2.00'
DIMENSIONS	
(METRIC)	(MM)

APPROVAL		日期
制图 xu dong bin		2012.05.09
审核		
核准		
文件位置		
ANGLE OF PROJECTION		

品名规格	USB 3.0 AF 180°焊线A款 (有卷边有缺口)	
料号	SEE TABLE	
字库	工程图号:	版本
A4	DWG-USBAF-0105	A2
比例	1 : 1	状态码 A 页数 1 OF 1