

1 2 3 4 5 6

A

B

C








D

A


B

C

D

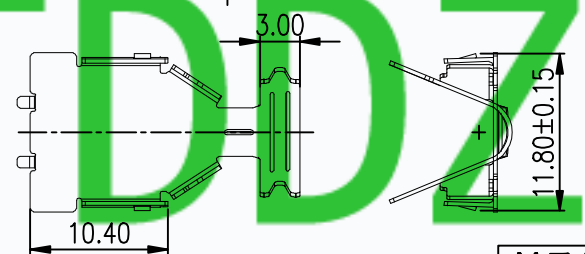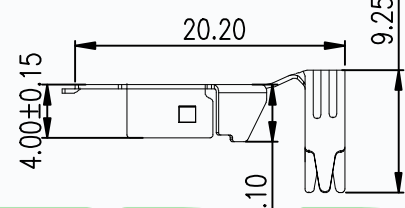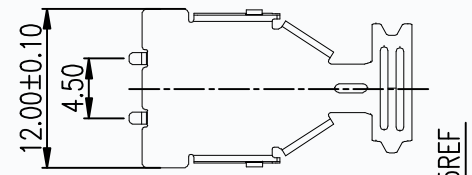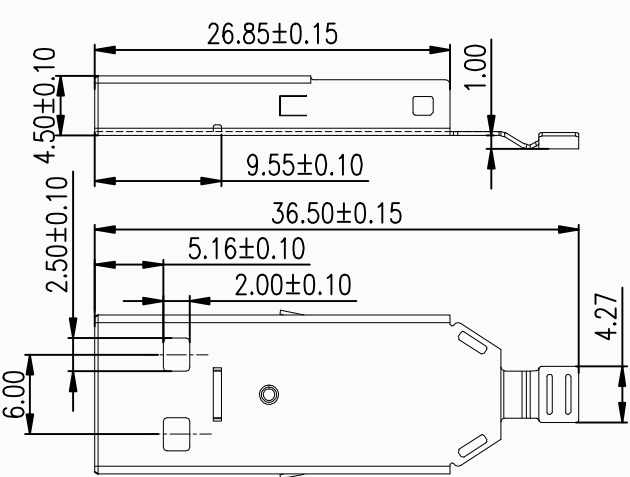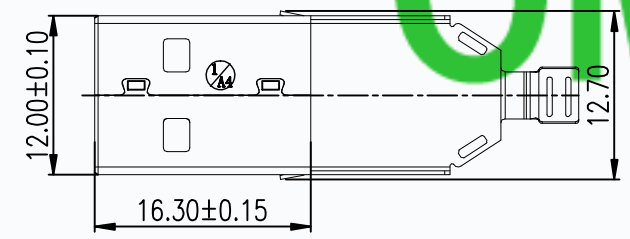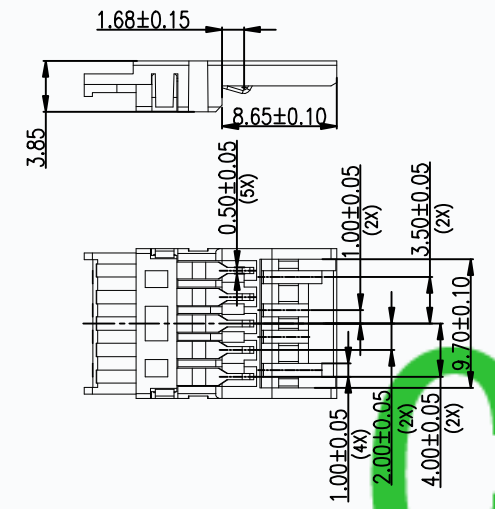

SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.
 MATERIAL: 8N Min After Durability
 Housing: PBT+30%GF 94V-0 COLOR:SEE TABLE
 Contact: copper alloy
 Shell: SPCC
 PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated/Gold flash
 operating Temperature:-55to+85°

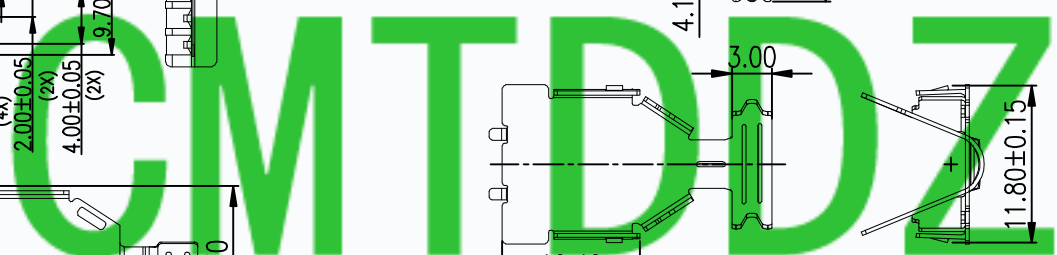

料号备注

T10	3	M	010	S	XX	P	XX	XX	XX
-----	---	---	-----	---	----	---	----	----	----

00-FBT整 前后壳镀镍	R-BUSSE.0标准	
12-半壳镀10°	01-FBT整 前壳镀金	D-镀层24μ
13-半壳镀30°	02-FBT整 前后壳镀金	B-FRACE标准
14-半壳镀60°	03-FBT深直[280C]前后壳镀镍	
15-半壳镀150°	04-FBT整 前壳镀壳镀镍 后壳壳壳镀镍	C-镀层48μ
16-半壳镀300°		

<p>东莞市田都电子有限公司 Dong Guan TianDu Electronics Co.,Ltd</p>							
Pin NUMBER	SIGNAL NAME	APPROVAL		日期	品名规格	USB AM 3.0 屏蔽一体三件套(OD=6.0)	
1	VBUS	制图 Elaine		2017.6.29			
2	D-	审核					
3	D+	核准			料号	SEE TABLE	
4	GND	文件位置			字深	工程图号:	版本
5	StdA_SSRX-	UNLESS OTHERWISE SPECIFIED TOLERANCES			A4	TDU-USB AM-1003	A4
6	StdA_SSRX+	X. +/-	METRIC 0.30				
7	GND_DRAIN	.X +/-	0.25				
8	StdA_SSTX-	.XX +/-	0.25				
9	StdA_SSTX+	FRACTIONS +/-	2.00'				
Shell		DIMENSIONS (METRIC) (MM)		ANGLE OF PROJECTION		比例	
				1:1		状态码 A 页数 1 OF 1	