
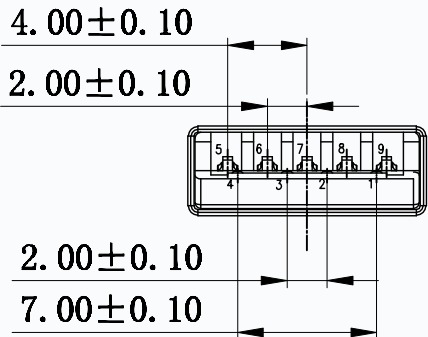
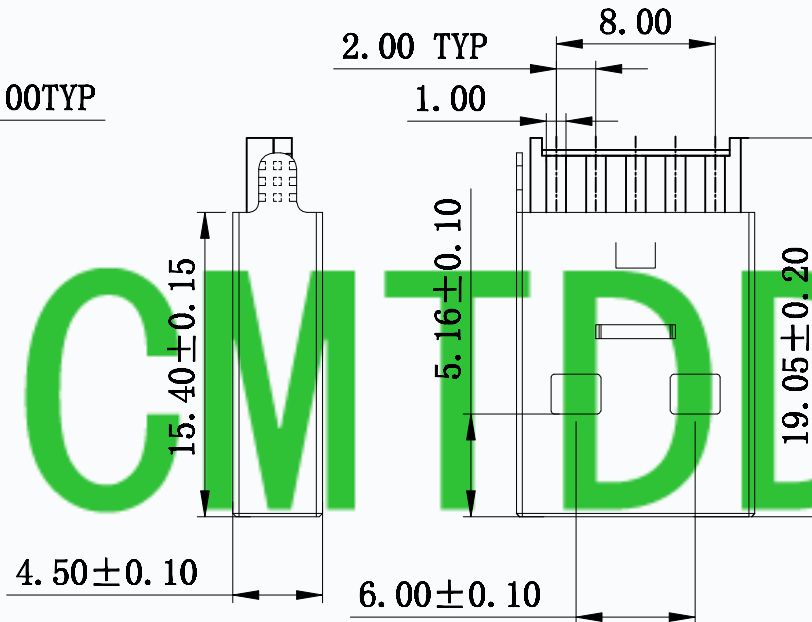
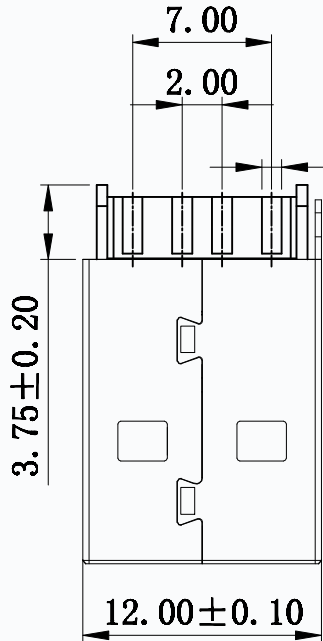


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A2	ECN130813020	新增规格	WEI	—		2013.08.13
A3	ECN130914005	新增规格	WEI	—		2013.09.14
A4	ECN150918001	新增规格	H.QIU	—		2015.09.18



SPECIFICATIONS:

Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.

Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts

Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability
 Housing: PBT+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy(T=0.25mm)
 Shell: SPCC

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated

operating Temperature:-55`to+85`

1/A1
1/A2
1/A3

料号备注

T10-3 M 009 S XX P XX R X


12=半金雾锡G/F	00=PBT蓝铁壳镀镍	R=ROHS2.0标准	D=盐雾24H
13=半金雾锡3U"	01=PBT蓝铁壳镀全金	W=无卤+ROHS2.0	C=盐雾48H
14=半金雾锡5U"	02=PBT蓝(2985C)铁壳镀镍	H=REACH标准	
15=半金雾锡15U"	03=PBT蓝铁壳镀金0.8u"-1.0u"		
16=半金雾锡30U"			

1/A4

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

UNLESS OTHERWISE SPECIFIED TOLERANCES

METRIC	0.30
.X	+/- 0.25
.XX	+/- 0.25
FRACTIONS	+/- 2.00'
ANGLES	+/-
DIMENSIONS	
(METRIC)	(MM)



东莞市田都电子有限公司

Dong Guan Tiandu Electronics Co.,Ltd

USB AM 3.0 焊线短体

SEE TABLE

工程图号: TDU-USB AM-010

版本 A4

比例 1 : 1 状态码 A 页数 1 OF 1