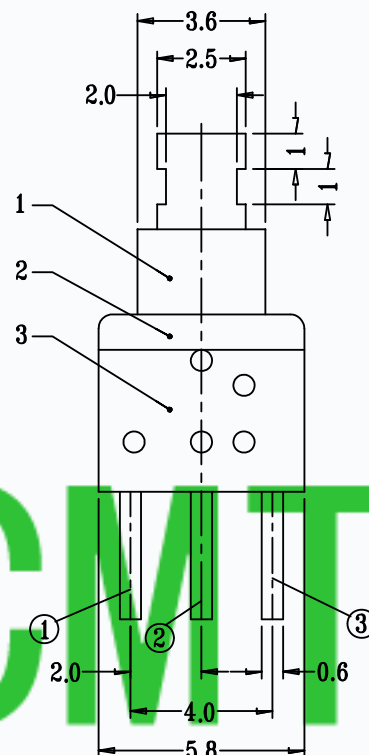
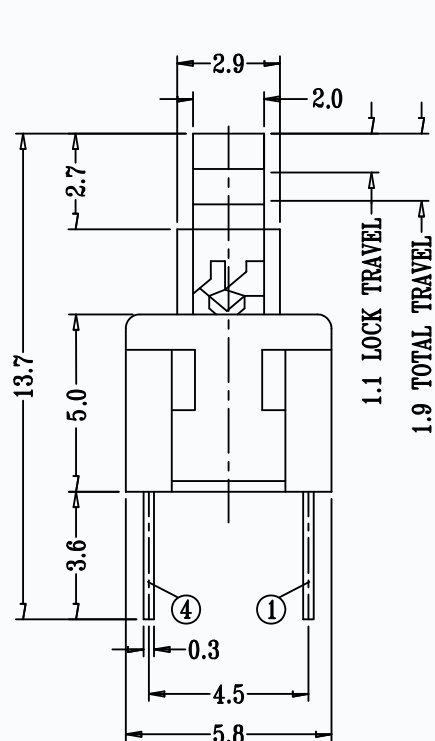


CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

OPERATING MODEL:

SELF-LOCK:T5-58F012D-L

Non-LOCK:T5-58F012D-NL

SPECIFICATIONS

Rating	0.2A 12V DC
CIRCUIT	2C-2P
Timing	NON-SHORTING
Travel	FULL:1.9mm
	LOCK:1.1mm
Operating Force	250gf $\pm$ 100gf
Operating Life	10.000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7	CAM STICK	SUS	1	NATURAL						
6	SPRING	SUS	1	NATURAL						
5	CONTACT CLIP	PHOSPHOR BRONZE	2	Ag PLATED			DESCRIPTIONS OF REVISION			APPD.
4	TERMINAL	BRASS	6	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T5-58F012D-00		
3	CASE	PA66	1	GREY	MODEL: SEE TABLE		SCALE: 3:1	DWN.	ERIC	2013-6-17
2	COVER	POM	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17
1	KNOB	POM	1	WHITE				APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH						