
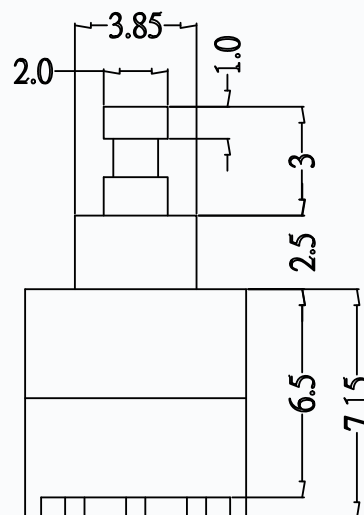
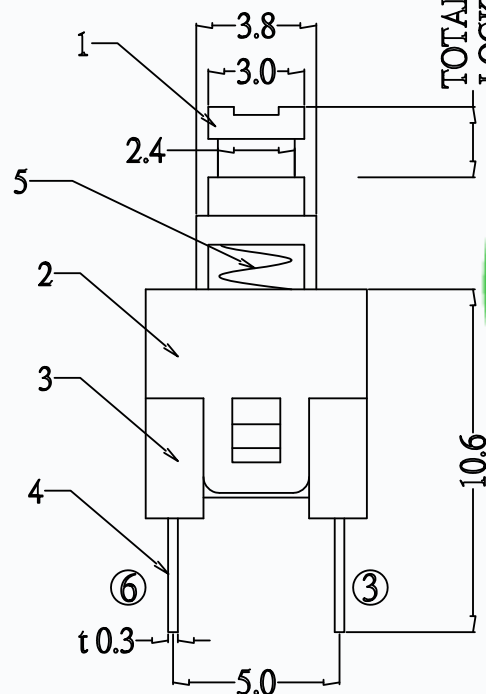


P.C.B MOUNTING PATTERN

OPERATING MODEL:

SELF-LOCK:T5-70F021D-L
Non-LOCK:T5-70F021D-NL

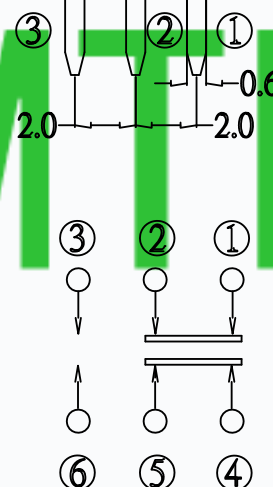

SCHEMATIC

SPECIFICATIONS	
Rating	0.1A 30V DC
CIRCUIT	2P-2T
Timing	NON-SHORTING
Travel	FULL:2.0mm
	LOCK:1.0mm
Operating Force	230gf ± 50gf
Operating Life	10.000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD				
7	CAM STICK	SUS	1	NATURAL						
6	SPRING	SUS	1	NATURAL						
5	CONTACT CLIP	PHOSPHOR BRONZE	2	Ag PLATED			DESCRIPTIONS OF REVISION			APPD.
4	TERMINAL	BRASS	6	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: CMTDDZ-T5-70F021D-00		
3	CASE	PA66	1	WHITE	MODEL: SEE TABLE		SCALE: 3:1	DWN.	ERIC	2013-6-17
2	COVER	PA66	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D	MAIKO	2013-6-17
1	KNOB	POM	1	GREEN				APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH						