CAD FILE:

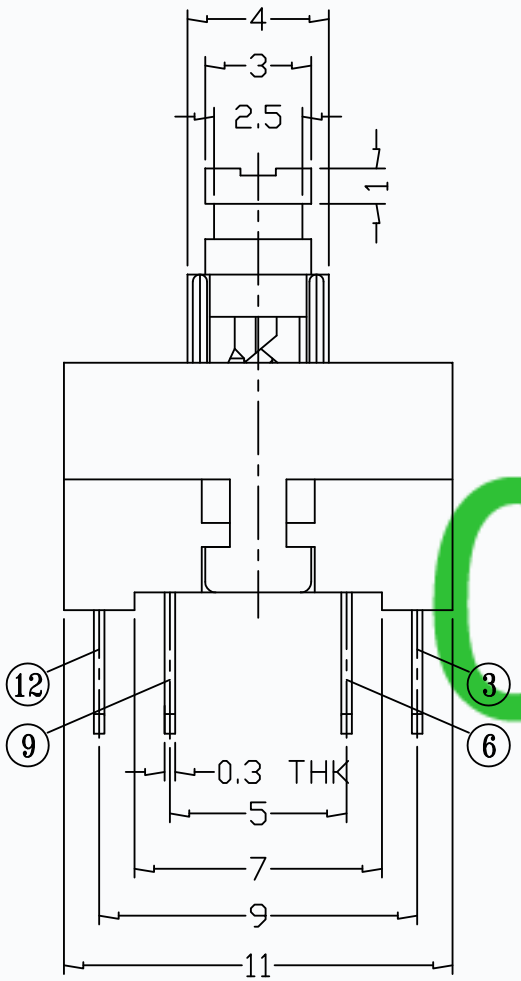

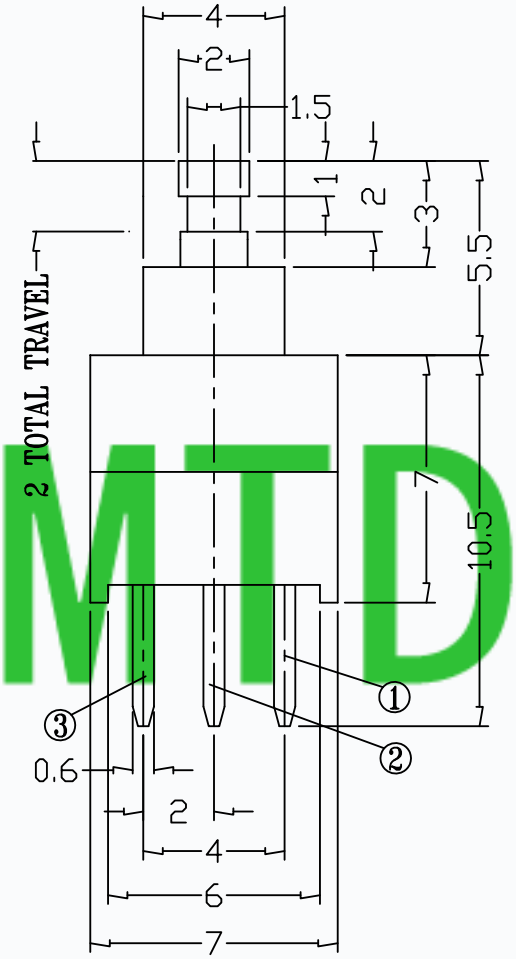

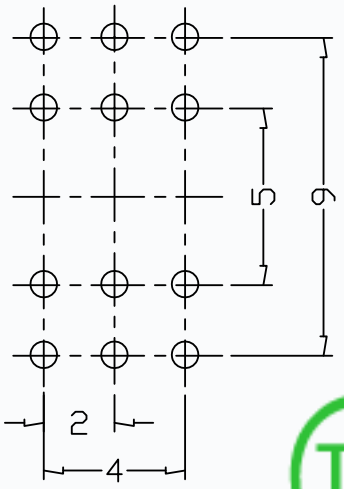

P.C.B LAYOUT



CIRCUIT DIAGRAM

CMTDZ

OPERATING MODEL:

SELF-LOCK:T5-70F035D-L
Non-LOCK:T5-70F035D-NL

SPECIFICATIONS	
Rating	0.1A 30V DC
CIRCUIT	4C-2P
Timing	NON-SHORTING
Travel	FULL:2.0mm
	LOCK:1.0mm
Operating Force	230gf ± 50gf
Operating Life	10.000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7	CAM STICK	SUS	1	NATURAL
6	SPRING	SUS	1	NATURAL
5	CONTACT CLIP	PHOSPHOR BRONZE	4	Ag PLATED
4	TERMINAL	BRASS	12	Ag PLATED
3	CASE	PA66	1	WHITE
2	COVER	PA66	1	BLACK
1	KNOB	POM	1	GREEN

TOLERANCE UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD

DESCRIPTIONS OF REVISION | APPD.

TITLE : VERTICAL SLIDE SWITCH | UNIT : mm | DRWG NO.: CMTDDZ-T5-70F035D-00

MODEL: SEE TABLE | SCALE: 3:1

CMTDDZ 东莞市田都电子有限公司
DONGGUAN TIANDU ELECTRONICS CO.,LTD.

DWN.	ERIC	2013-6-17
CHK'D	MAIKO	2013-6-17
APPD.	Coco	2013-6-17