


REV.	MODIFICATION	REV. No.	NAME	DATE
A0	△新版发行			2019-04-24



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED Min ON CONTACT AREA, 100u"
 Min TIN (LEAD FREE) ON SOLDER AREA,
 SHELL: COPPER ALLOY C2680, T=0.30±0.03mm
 50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.
 DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS;
 1.25A FOR GND PIN.
 0.25A FOR OTHER.

VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.


4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:

图示有标注者为首样全检, 重点管控尺寸.

6. 产品符合RoHS标准

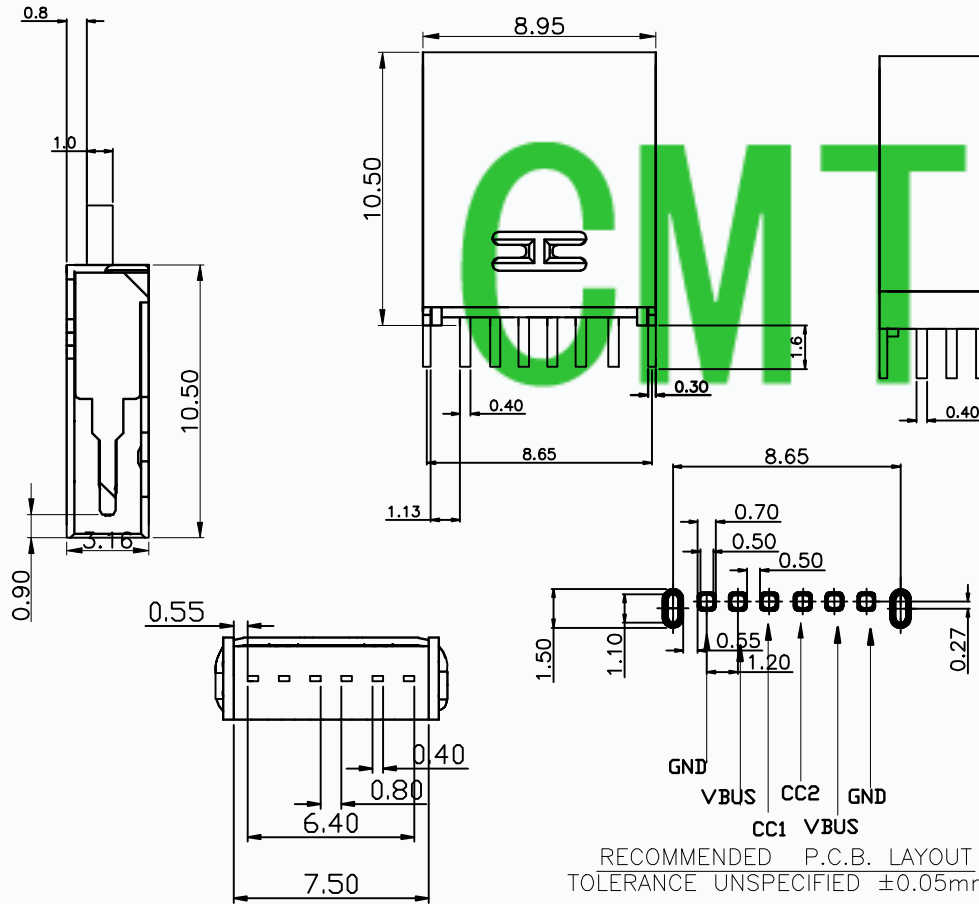

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE UNSPECIFIED ±0.05mm

东莞市田都电子有限公司
 DONGGUAN TIANDU ELECTRONICS CO., LTD

.X: ±0.35	.X': ±1.5'	INTENDED USE: CONNECTOR	TITLE: USB TYPE C 6PIN PLUG 简易版立贴直插10.5	
.XX: ±0.25	.XX': ±1.0'		PART NO.:	SEE TABLE
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	DWG. NO.:	T11-06LC03
MAT'L: SEE NOTES		CHKD.:	SCALE: 1:1	PAGE: 1/1
FINISH:		DR.:	UNIT: mm	REV.: A0