





RECOMMENDE.P.C.B LAYOUT(TOP VIEW)
EFAULT YOLERANCE:±0.05

- 规格说明: Specifications:
- 电气特性: Electrical:
- 额定电流: Current Rating
1.5A/contact terminal
 - 额定电压: Voltage Rating
30V DC
 - 接触电阻: Contact Resistance
30 milliohms MAX
 - 绝缘电压: Dielectric Withstanding Voltage:
100 V AC AT Sea Level
 - 绝缘电阻: Insulation Resistance:
100MEGA ohms MIN

- 物理特性: Mechanical:
- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
 - 端子保持力: Terminal Retention
0.5kgf(MIN)

- 原材料: Material:
- 壳体: Housing:
High Temperature Plastic,
LCP White/Black
 - 端子: Contact: Copper Alloy C2680/c5191
 - 壳体: Shell: Copper Alloy C2680/SUS

- 电镀: Finished:
- 端子: Contact: Plated Gold in Mating Area;
Matte Tin On Solder Tails
 - 壳体: Shell:
Plated Matte tin, Salt spray test: 24 hours

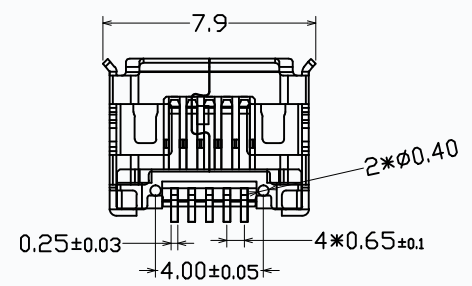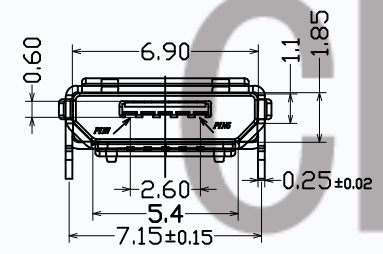

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD

DIM	TOL	DIM	TOL
X.	±0.35	X°	±1°
X.X	±0.25	X.X°	±0.5°
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

UNITS mm	NAME<INTENDED USE>	东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD		
	MAT'L 材质	USB	MODEL NO.	TITLE: MICRO USB 5P/F B-TYPE 间距(7.15) 引脚间距(5.0)
FINISH 硬度	APPD:	T10-05FB21	DWG NO.:	CMTD03-565-5P-02
	CHKD:		数量	SCALE SHEET REV. 1/1 1/1 A
Q'TY 数量	DR:	MC 11/9'13		