

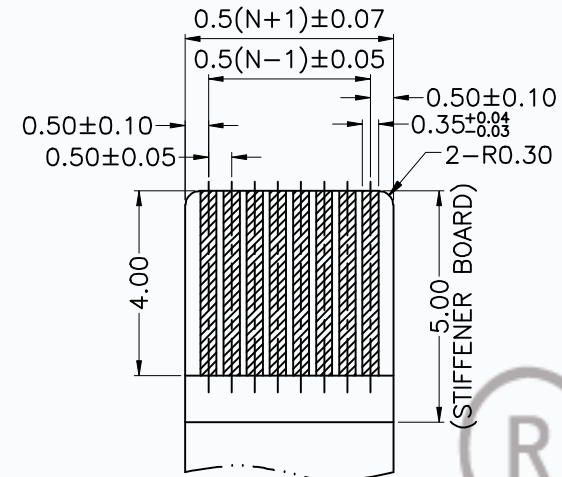
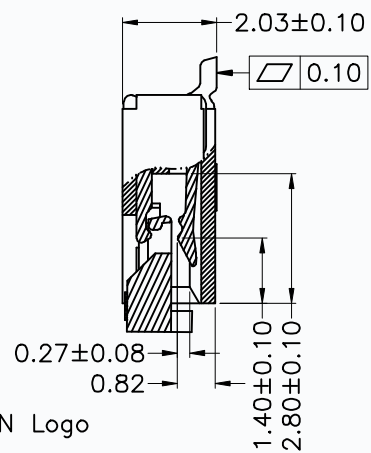
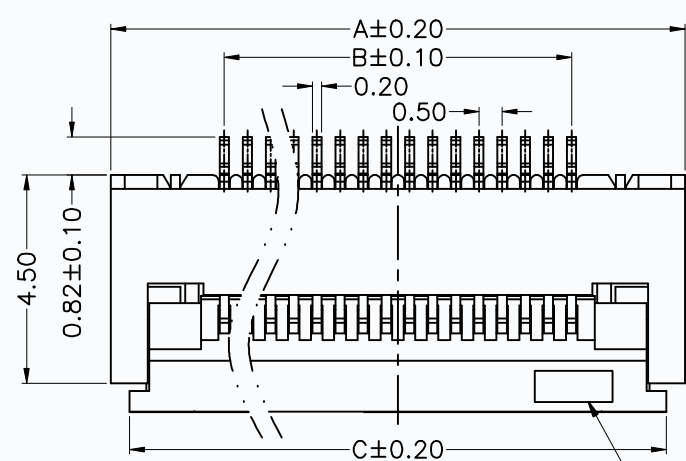
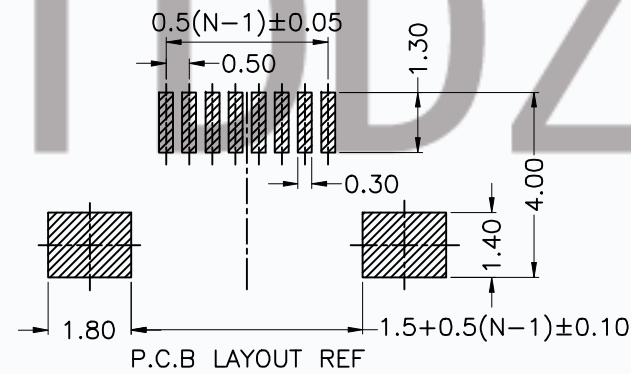


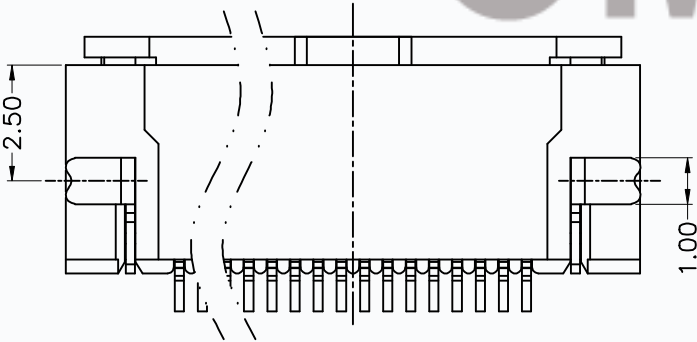

APPLICABLE FPC/FFC
RECOMMENDED DIMENSION
(THICKNESS:0.30±0.03)

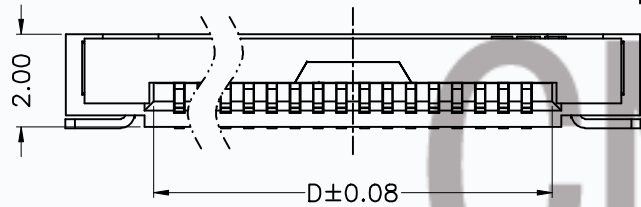

1.MATERIAL:

- 1.1 HOUSING: LCP,UL94V-0; COLOR: NATURE.
- 1.2 ACTUATOR: LCP,UL94V-0; COLOR: BLACK.
- 1.3 CONTACT: C5191,T=0.20±0.01mm
- 1.4 SOLDER PAD: C2680,T=0.20±0.01mm

2.FINISH:

- 2.1 CONTACT:100u" MIN. TIN PLATED IN SOLDER AREA 50u" MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SOLDER PAD: 50u" MIN. NICKEL PLATED OVERALL. 100u" MIN. TIN PLATED OVERALL.

50	29.40	24.50	28.50	25.60
49	28.90	24.00	28.00	25.10
48	28.40	23.50	27.50	24.60
47	27.90	23.00	27.00	24.10
46	27.40	22.50	26.50	23.60
45	26.90	22.00	26.00	23.10
44	26.40	21.50	25.50	22.60
43	25.90	21.00	25.00	22.10
42	25.40	20.50	24.50	21.60
41	24.90	20.00	24.00	21.10
40	24.40	19.50	23.50	20.60
39	23.90	19.00	23.00	20.10
38	23.40	18.50	22.50	19.60
37	22.90	18.00	22.00	19.10
36	22.40	17.50	21.50	18.60
35	21.90	17.00	21.00	18.10
34	21.40	16.50	20.50	17.60
33	20.90	16.00	20.00	17.10
32	20.40	15.50	19.50	16.60
31	19.90	15.00	19.00	16.10
30	19.40	14.50	18.50	15.60
29	18.90	14.00	18.00	15.10
28	18.40	13.50	17.50	14.60
27	17.90	13.00	17.00	14.10
26	17.40	12.50	16.50	13.60
25	16.90	12.00	16.00	13.10
24	16.40	11.50	15.50	12.60
23	15.90	11.00	15.00	12.10
22	15.40	10.50	14.50	11.60
21	14.90	10.00	14.00	11.10
20	14.40	9.50	13.50	10.60
19	13.90	9.00	13.00	10.10
18	13.40	8.50	12.50	9.60
17	12.90	8.00	12.00	9.10
16	12.40	7.50	11.50	8.60
15	11.90	7.00	11.00	8.10
14	11.40	6.50	10.50	7.60
13	10.90	6.00	10.00	7.10
12	10.40	5.50	9.50	6.60
11	9.90	5.00	9.00	6.10
10	9.40	4.50	8.50	5.60
9	8.90	4.00	8.00	5.10
8	8.40	3.50	7.50	4.60
7	7.90	3.00	7.00	4.10
6	7.40	2.50	6.50	3.60
5	6.90	2.00	6.00	3.10
4	6.40	1.50	5.50	2.60
No. of Contacts	A	B	C	D

A	初版发行	2018/07/24
REV	DESCRIPTION	DATE

X. ± 0.30	APPD:	TITLE:	田都科技 CMTDDZ
.X ± 0.25	CHKD:	0.5P 2.0H 前城FPC成品	
.XX ± 0.20	DR:	PART NO:	
.XXX±		T17-0520QX-XX	
X' ± 1'		DWG NO:	
.X' ± 0.5'		CMTDDZ-T17-0520QX-22	
UNITS: mm	SCALE: 1:1		SHEET:10F1
			REV: A