

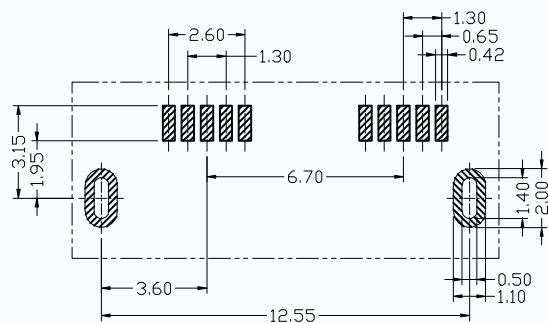
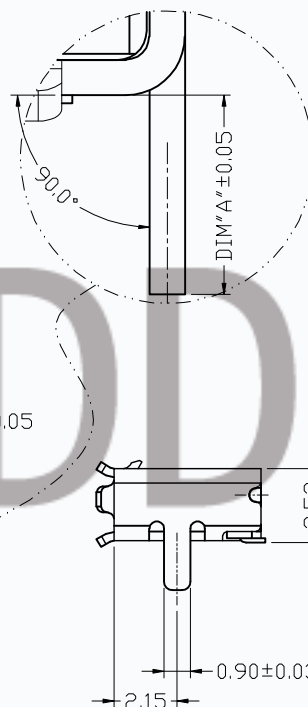
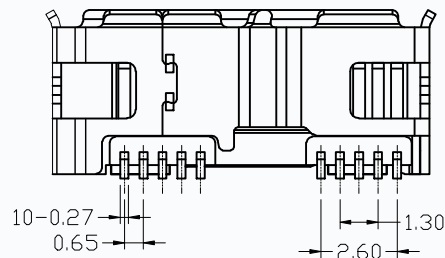
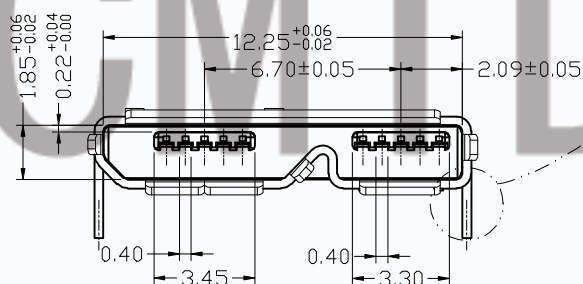
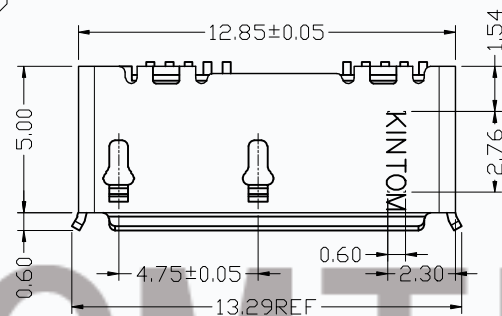
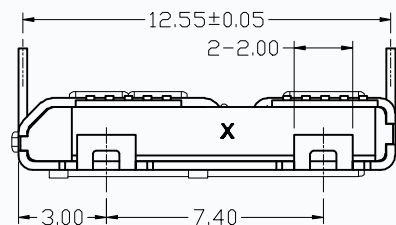


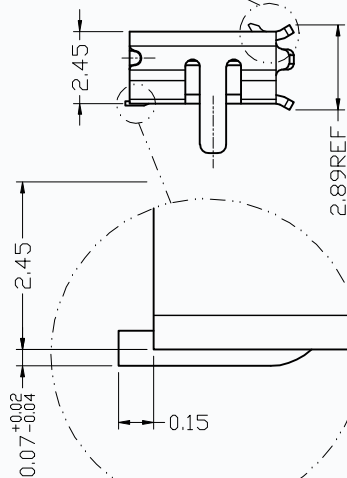

RECOMMEND PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE ± 0.05

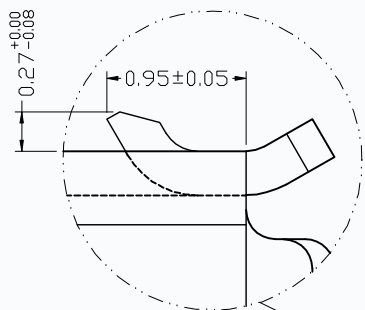

Version	Change content	DATE
A	新图发行	26/Jun-'14

产品图

NOTES:

1.MECHANICAL:

MATING FORCE: 35N MAX.

UNMATING FORCE: 10N MIN,INITIAL.

8~20N AFTER 10000 CYCLES.

DURABILITY: 5000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.0A

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 30 mΩ MAX INITIAL;

40 mΩ MAX AFTER 10000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

4. SALT SPRAY : 24 H AT 35%DC WITH
5%-SALT-SOLUTION CONCENTRATION.

5.PRODUCT SPEC:SP-MICRO USB-001

6.PACKAGE SPEC:DWG-PK MUB-OXX

7.PRODUCT MEET FOR ROHS STANDARD

Part no. Note:

T10-B1FDF0BTU-CXXX

序号.. 01.02.03...
C=成品
W=无卤 U=有卤
屏蔽壳电镀: C=镀金 T=镀亮锡 R=一般镀
S=不锈钢 F=镀厚锡 M=镀金后镍
B=黑色 W=白色
0:Fu 1:3u" 2:5u" 3:10u" 4:15u" 5:30u"...
M:公头 F:母头
E:贴片式外壳 C:沉板式外壳 D:插板式外壳
对接口=F:翻边 P:平口
1:单层 2:双层
A:A型 B:B型
系列: MICRO USB3.0

title: MICRO USB 3.0 双脚(DIP:12.55) 翻边母座		CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO., LTD	
tolerances		app.	units
linear	angles	chk.	☐ mm ☐ inch
x. .020 .x .010 .xx .005	x. .01. .x .005. .xx .010.	dr.	size A4
projection	scale	date.	26/Jun-'14
		mould no.	
		dwg no.	T10-B1FDF0BTU-CXXX
		ele'l	rigid
		q'ty	

The following part fittings of a machine

PART NO.	PART NAME	Q'TY	Material	PART NO.	DESCRIPTION	DIM A
T10-F3BNM-H004	Housing	1	LCP 130i 黑色	T10-B1FDF0BTU-C054	MICRO USB 3.0 DIP(12.55MM)+2DIP ; WITHOUT POST	1.20
T10-FPG0M-T003	Terminal	10	C5191R-H,T=0.15mm			
T10-B1DFW-(S039~S042)	shell	1	SUS304-1/2H,T=0.30mm			