

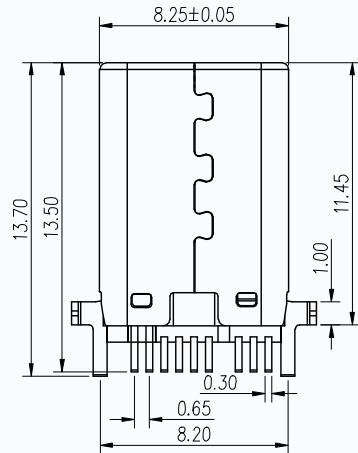
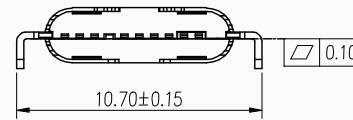

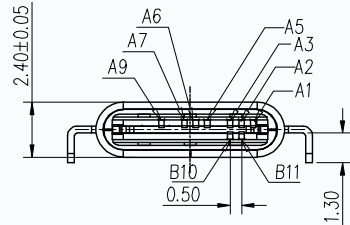




RoHS Compliant

REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW		

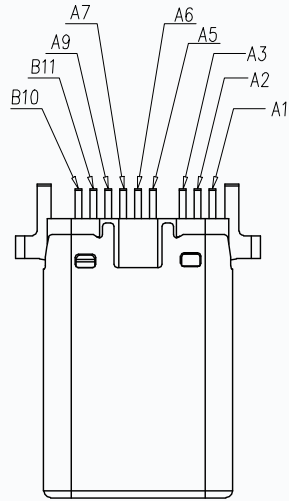

Specification:

- 1.Electrical Characteristics:  
 Contact Current Rating: 3 Amperes Max.  
 Rated Voltage: 30V Max.  
 Dielectric Withstanding Voltage: AC 100V r.m.s.  
 Insulation Resistance: 100 MΩ Minimum.  
 Contact Resistance: 40 mΩ Maximum.
- 2.Environmental:  
 Operating Temperature: -30°C~+85°C.
- 3.Mechanical Characteristics:  
 Insertion Force: 5~20Nf.  
 Withdrawal Force: 8~20Nf.  
 Durability Cycles: 10000 Cycles.

CMTDDZ

5	EMC SPRING	Stainless Steel;SUS201,T=0.10mm;
4	CONTACT	Copper Alloy;AuNiSn;
3	LATCH	Stainless Steel;SUS301,T=0.3mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel;SUS316,T=0.15mm;
NO.	NAME	DESCRIPTION

A12	A11	A10	A9	A8	A7	A6	A5		A3	A2	A1
			VBUS		D-	D+	CC		TX1-	TX1+	GND
									RX1-	RX1+	
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

X.	±0.50	X.°	± 2°	UNITS	mm
.X	±0.30	.X°	± 1°		
.XX	±0.10	.XX°	± 0.5°	MAT'L	
.XXX	±0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD.					
				FINISH	
				Q'TY	

东莞市田都科技有限公司  
 DONGGUAN TIANDU TECHNOLOGY CO.,LTD

TITLE:  
**TYPE-C 9P沉板1.04mm公头 单排SMT 铆压款**

APPD:	DWG NO:			
CHKD:	T11-3M-003S			
DR:		SCALE	SHEET	REV.
		1/1	1/1	A1