
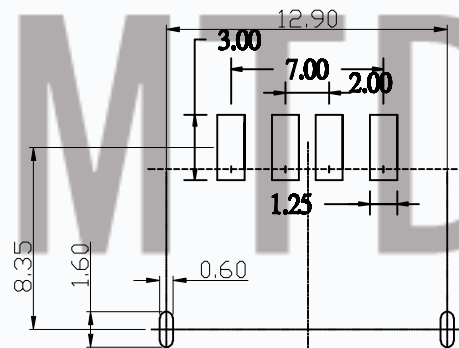
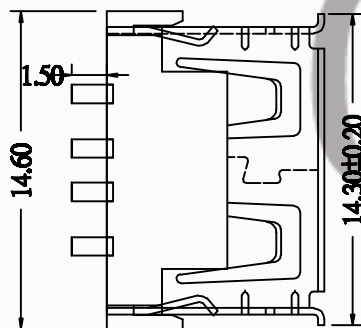
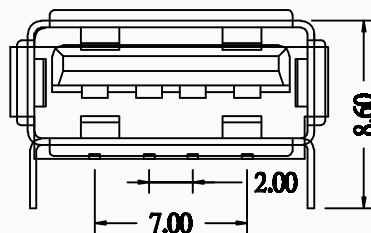


RoHS Compliant



RECOMMENDED P.C.B LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)
3. 寿命: Durability
1500 CYCLES MIN

T10-2F630DS-X X X X X X X X
B=盐雾24H C=盐雾48H
包装方式PACK:
2: 盘装 3: 管装 4: 载带
端子电镀SPRING PLATING:
0: 镀金GF 5: 5u" 6: 15u" 8: 30u"
端子材质SPRING CONTACT:
C: 黄铜 P: 磷铜
外壳电镀SHELL PLATING:
N: 镀镍 T: 镀雾锡
外壳材质SHELL:
S: 不锈钢 C: 黄铜 A: 冷轧钢板
塑胶颜色HOUSING COLOUR:
W: 白色 B: 黑色 L: 蓝色 Y: 黄色 G: 绿色
塑胶材质HOUSING:
0: PBT 3: LCP 6: PA-6T 9: PA-9T

CMTDDZ 东莞市田都科技有限公司 Dongguan Tiandu Technology Co., Ltd TEL: 0769-85384807 FAX: 0769-85384842		图号 (DWG NO)		单位 (UNIT): MM
		版本 (REV)	A/0	比例 (SCALE) 1:1
		日期 (DATE)	2015.06.09	未注公差 TOLERANCE UNSPECIFIED
		设计 (DESIGN)	ERIC	XX ±0.30 XXX ±0.20 XXX ±0.10 X' ±0.5 X' ±2°
		审核 (CHECKED)	~	
品名 (ITEM NO)	USB A/F 短体10.0贴片卷边前2脚 6.3H	核准 (APPROVED)		
料号 (PART NO)	T10-2F630DS-XXXXXXX			
模号 (MODEL NO)	N/A			