




CAD FILE:



**DIMENSIONS**

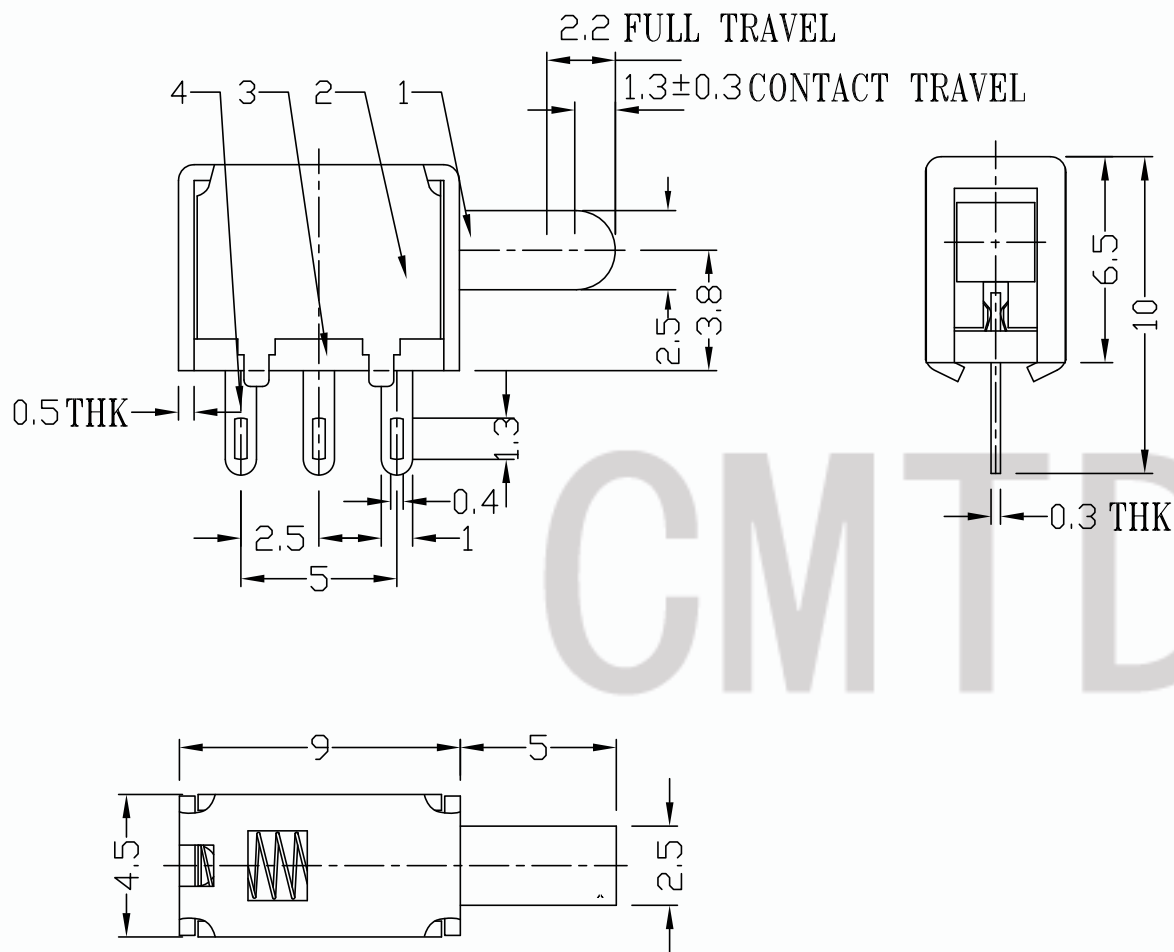

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

**ELECTRO-MECHANICAL CHARACTERISTICS**

Rating	0.3A 50V DC
Circuit	1P2T
Contact Resistance	< 100 mΩ MAX
Timing	NON-SHORTING
Operationg Mode	NON-LOCK
Stroke	FULL 2.2mm, CONTACT 1.3±0.3
Operating Force	70gf ± 20gf
Operating Life	10.000 cycles

8					<b>TOLERANCE UNLESS SPECIFIED</b> WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD	DESCRIPTIONS OF REVISION			APPD.	
7											
6	SPRING	STEEL WIRE	1	NATURAL							
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED							
4	TERMINAL	BRASS STRIP	3	Ag PLATED	TITLE : HORIZONTAL PUSH SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T5-122001N-00				
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T5-122001N	SCALE: 4:1	DWN.	ERIC	2013-6-17		
2	FRAME	STEEL STRIP	1	NI PLATED	<b>CMTDDZ 东莞市田都科技有限公司</b> DONGGUAN TIANDU TECHNOLOGY CO., LTD.		CHK'D	MAIKO	2013-6-17		
1	NOB	POM	1	BLACK			APPD.	Coco	2013-6-17		
NO.	PARTS	MATERIALS	Q'TY	FINISHING							