

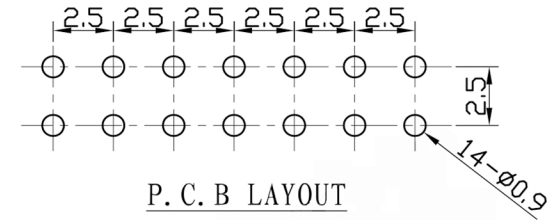

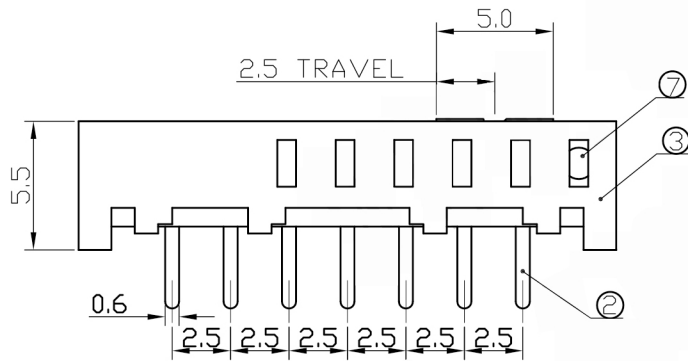


CAD FILE:

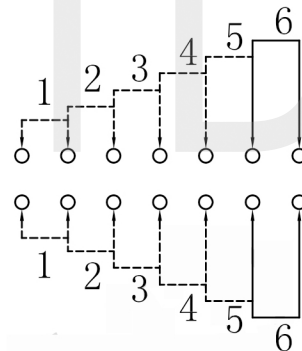

P.C.B LAYOUT

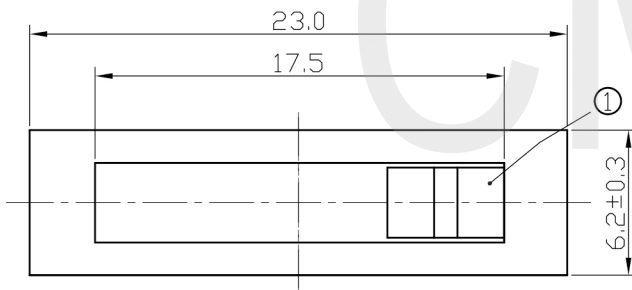

SCHEMATIC (NON-SHORTING)

P.C.B. LAYOUT

SPECIFICATIONS	
Rating	0.3A 50V DC
CIRCUIT	2P6T
Timing	NON-SHORTING
Travel	2.5mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE	DESCRIPTIONS OF REVISION	PPD.
8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD	
7	STEEL BALL	STEEL	2	NATURAL			
6	SPRING	STEEL WIRE	1	NATURAL			
5	BASE	PHENOLIC RESIN	1	NATURAL			
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED			
3	FRAME	STEEL STRIP	1	NI PLATED			
2	TERMINAL	BRASS STRIP	14	Ag PLATED			
1	KNOB	POM	1	BLACK			
					TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T2-262502A-00
					MODEL: T2-262502A-G	SCALE: 3:1	DWN. ERIC 2013-6-17
					CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.	CHK'D MAIKO 2013-6-17	
						APPD. Coco 2013-6-17	