

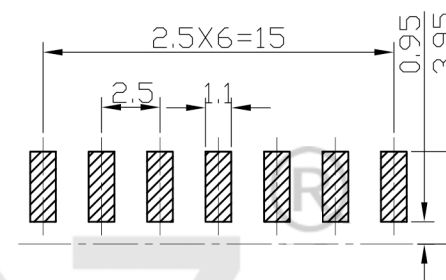
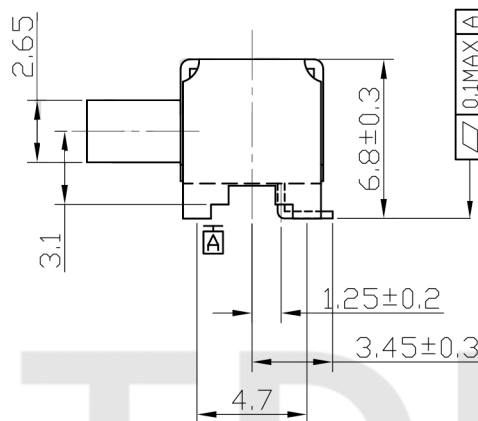
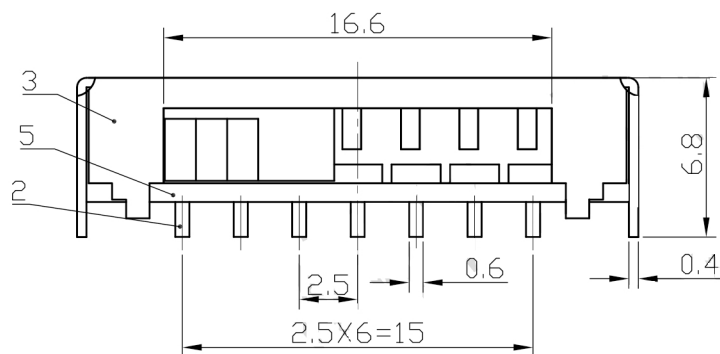


CAD FILE:

MODEL NO.	KNOB(G/VG)
T3-162506-G	(2~15)mm

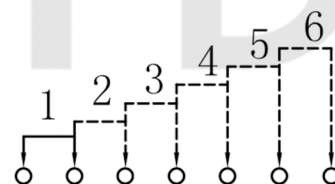

P.C.B. LAYOUT

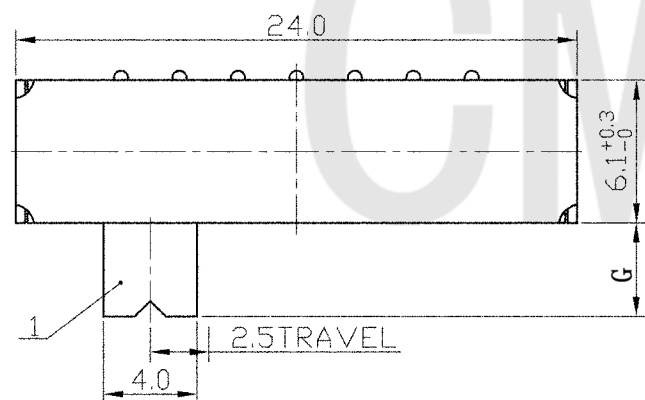

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS	
Rating	0.3A 50V DC
CIRCUIT	1P6T
Timing	NON-SHORTING
Travel	2.5mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD	DESCRIPTIONS OF REVISION			
					WITHIN 1.5mm : ±0.1mm						
					OVER 1.5mm : ±0.2mm						
8							TITLE : HORIZONTAL SLIDE SWITCH MODEL: T3-162506-G SCALE: 3:1 UNIT : mm DRWG NO.: CMTDDZ-T3-162506-00				
7	STEEL BALL	STEEL	1	NATURAL				DWN.	ERIC	2013-6-17	
6	SPRING	STEEL WIRE	1	NATURAL				CHK'D	MAIKO	2013-6-17	
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED				APPD.	Coco	2013-6-17	
4	TERMINAL	BRASS STRIP	7	Ag PLATED							
3	BASE	PHENOLIC RESIN	1	NATURAL							
2	KNOB	POM	1	BLACK							
1	FRAME	STEEL STRIP	1	NI PLATED							
NO.	PARTS	MATERIALS	Q'TY	FINISH							

CMTDDZ 东莞市田都科技有限公司
DONGGUAN TIANDU TECHNOLOGY CO.,LTD.