



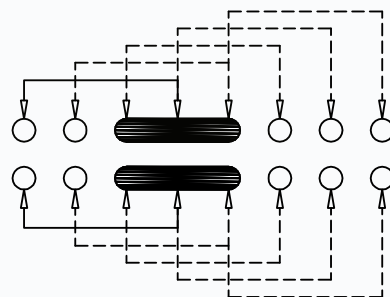


CAD FILE:


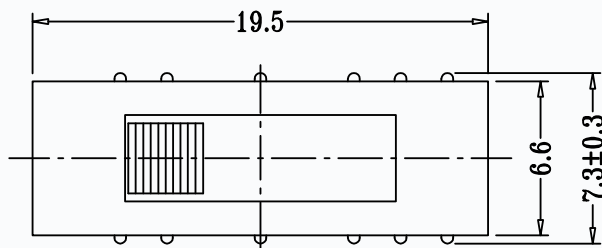


SCHMATIC (SHORTING)

MODEL NO.	KNOB(G/VG)
T2-252001S-G	(2~11)mm

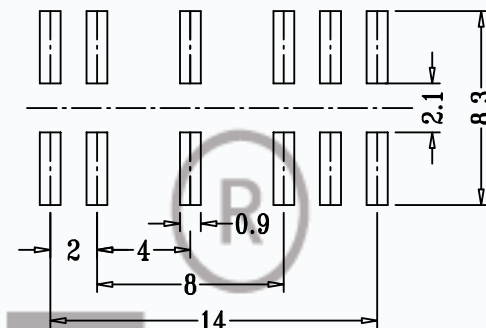

P.C.B LAYOUT
BOTTOM VIEW

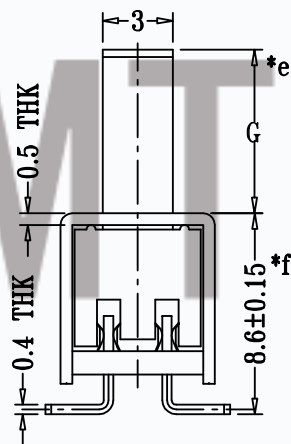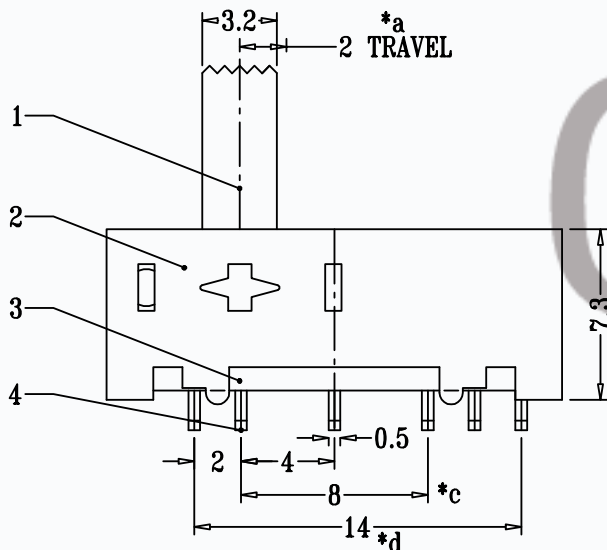

SPECIFICATIONS

Rating	0.3A 30V DC
CIRCUIT	2P5T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD		DESCRIPTIONS OF REVISION		APPD.
8											
7	SPRING BALL	STELL	2	NATURAL							
6	SPRING	STEEL WIRE	1	NATURAL							
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED							
4	TERMINAL	BRASS STRIP	12	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm		DRWG NO.: CMTDDZ-T2-252001S-00		
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T2-252001S-G		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	KNOB	POM	1	BLACK	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED					APPD.	Coco	2013-6-17