
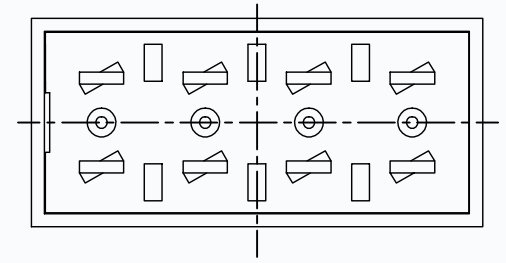
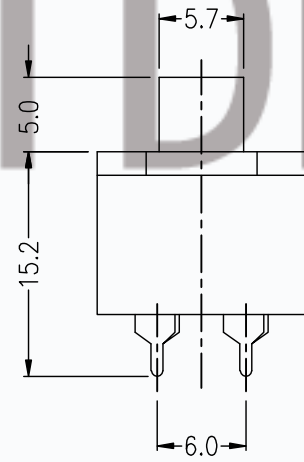
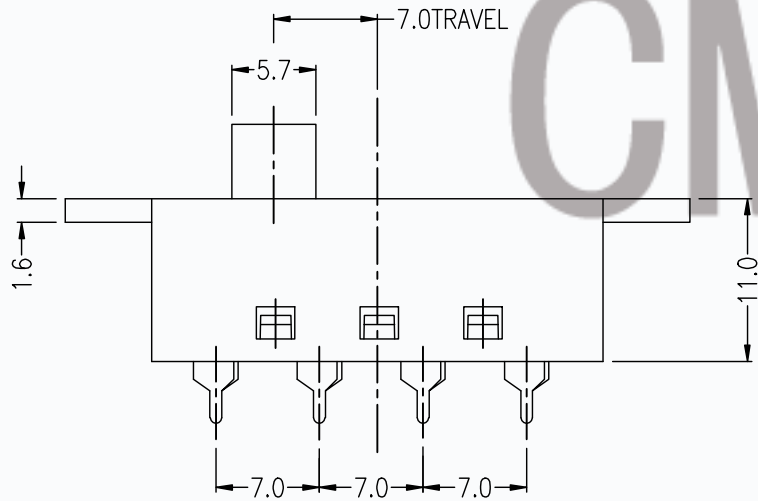
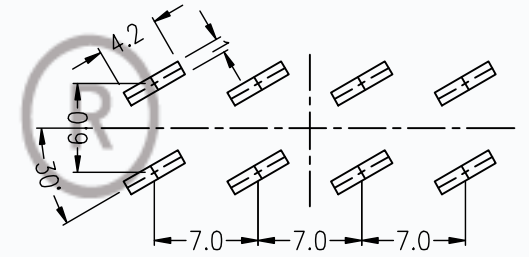
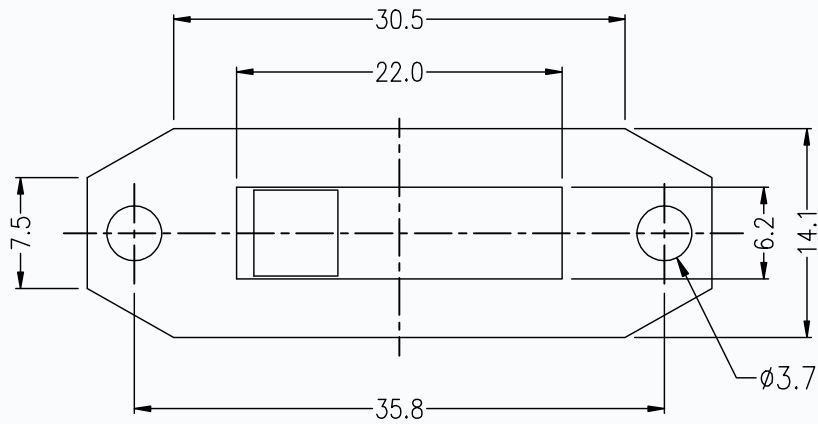


产品规格 Specifications:

| | |
|--------------------------|-------------------------------|
| Rating | 8(2)A 6(2)A 3(2)A 250V/125VAC |
| Contact Resistance | 100mΩ MAX |
| Insulation Resistance | 100MΩ MIN |
| Dielectric Voltage | AC 1500V 1 Minute |
| Operating Force (gf) | 600+/-200 gf |
| Life test without load | 10000 Cycles |
| Ambient Temperature Used | -25° C To 125° C |

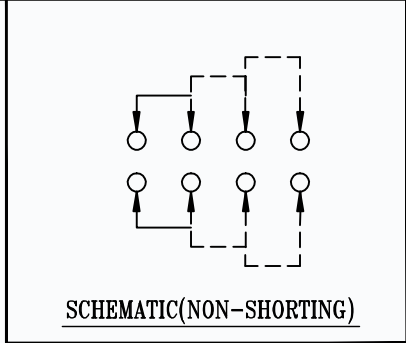

| NO. | PARTS | MATERIALS | Q'TY | FINISHING | TOLERANCE | ISSUE | DATE | DESCRIPTIONS OF REVISION | APPD. |
|-----|----------------|--------------|------|-----------|--|--------------|--------------|--------------------------|-------|
| 8 | SPRING COIL | STEEL WIRE | 1 | NATURAL | UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm | A | 2021-July-20 | 初版 | |
| 7 | PLASTIC NUT | HTPA | 1 | BLACK | | | | | |
| 6 | SPRING COIL | STEEL WIRE | 4 | NATURAL | | | | | |
| 5 | CONTACT BRIDGE | COPPER ALLOY | 2 | Ag PLATED | | PROJECT AGL: | | CAD FILE: T4-237001A-TG | |
| 4 | TERMINAL | COPPER ALLOY | 6 | Ag PLATED | TITLE : AC VERTICAL SLIDE SWITCH | | UNIT : mm | P/N: 1010156090814010 | |
| 3 | BASE | HTPA | 1 | BLACK | MODEL: T4-237001A-TG05 SERIES | | SCALE: 3 : 1 | DWN. | |
| 2 | PLASTIC COVER | HTPA | 1 | BLACK | 东莞市田都科技有限公司 DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD | | | CHK'D | |
| 1 | KNOB | HTPA | 1 | BLACK | | | | APPD. | |