
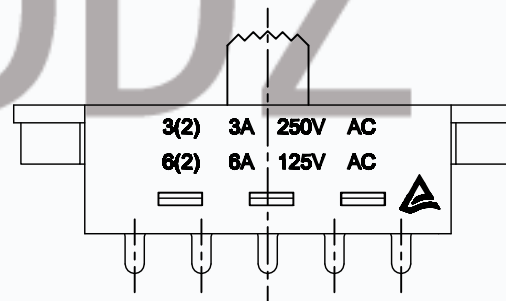
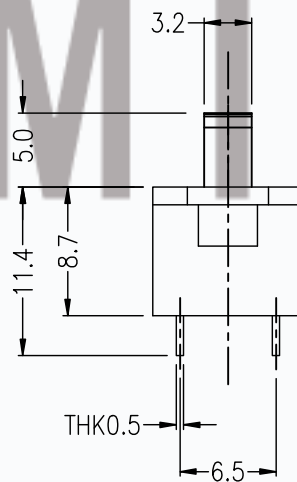
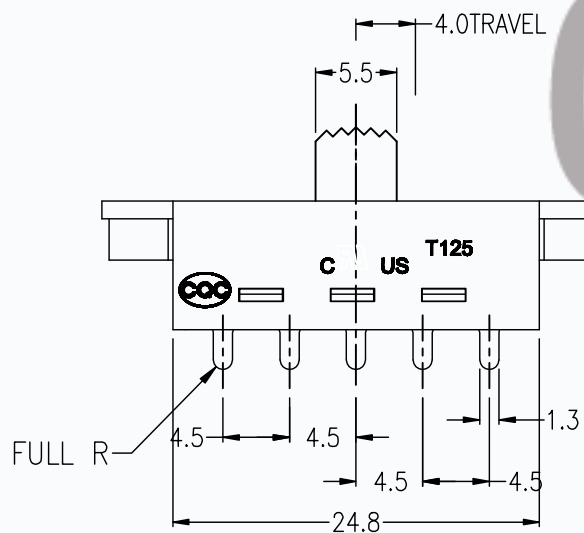
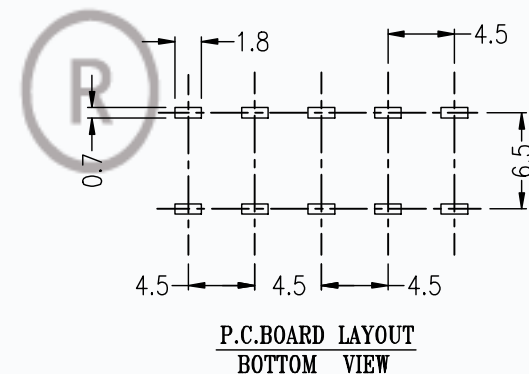
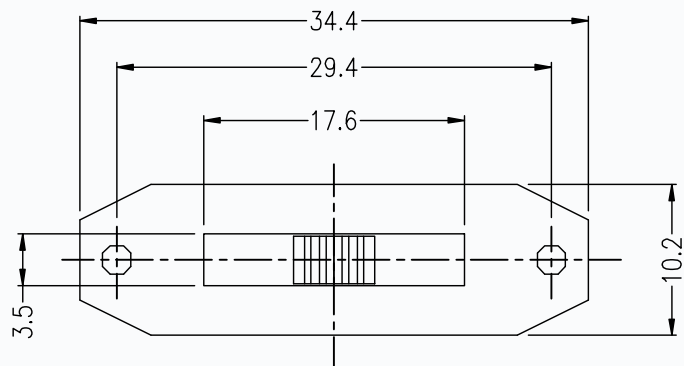


产品规格 Specifications:

| | |
|--------------------------|--|
| Rating | UL cUL: 6(2)A 3(2)A 125VAC TUV: 6(2)A 3(2)A 250V/125VAC CQC: 6(2)A 3(2)A 250V/125VAC |
| Contact Resistance | 100mΩ MAX |
| Insulation Resistance | 100MΩ MIN |
| Dielectric Voltage | AC 1500V 1 Minute |
| Operating Force (gf) | 500+/-200 gf |
| Life test without load | 10000 Cycles |
| Ambient Temperature Used | -25° C To 125° C |

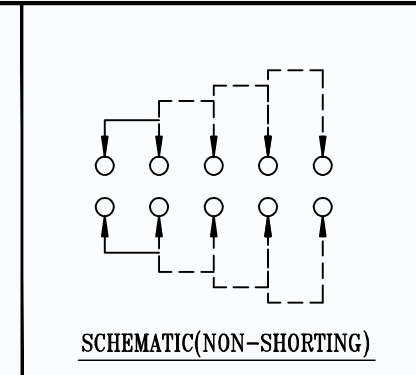

| NO. | PARTS | MATERIALS | Q'TY | FINISHING | TOLERANCE | UNLESS SPECIFIED | PROJECT AGL: | DATE | DESCRIPTIONS OF REVISION | APPD. |
|-----|----------------|--------------|------|-----------|--|------------------|--------------|------|--------------------------|-------|
| 8 | SPRING COIL | STEEL WIRE | 1 | NATURAL | WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm | A | 2021-July-20 | 初版 | CAD FILE: T4-244504-G | |
| 7 | STEEL BALL | STEEL | 1 | NATURAL | | | | | | |
| 6 | SPRING COIL | STEEL WIRE | 4 | NATURAL | | | | | | |
| 5 | CONTACT BRIDGE | COPPER ALLOY | 2 | Ag PLATED | | | | | | |
| 4 | TERMINAL | COPPER ALLOY | 10 | Ag PLATED | TITLE : AC VERTICAL SLIDE SWITCH | | | | | |
| 3 | BOARD | NYLON HTPA | 1 | BLACK | MODEL: T4-244504-G5 | | | | | |
| 2 | PLASTIC COVER | NYLON HTPA | 1 | BLACK | UNIT : mm P/N: 101015702011300 | | | | | |
| 1 | KNOB | NYLON HTPA | 1 | BLACK | SCALE: 3 : 1 DWN. | | | | | |
| | | | | | APPD. | | | | | |
| | | | | | CHK'D | | | | | |
| | | | | | DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD | | | | | |

东莞市田都科技有限公司
DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD