
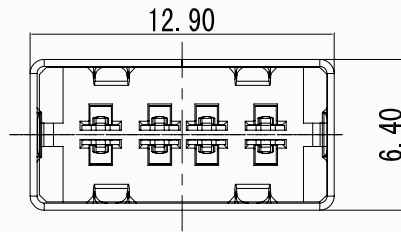


S/N	MODIFICATION	MARK	DATE	DRAW
	NEW		2021-06-20	



NOTES:

1.MATERIAL:

1.1 HOUSHING:THERMOPLASTIC COLOR:BLACK

1.2 CONTACT:COPPER ALLOY

2. PLATING;

CONTACT:

1). GOLD FLASH CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL





2). 5u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

3). 15u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

4.ENVIRONMENTAL:

OPERATION TEMPERATURE:-40° C~+85° C

5.PRODUCT COMPLIANT TO THE REQUEST OF RoHS

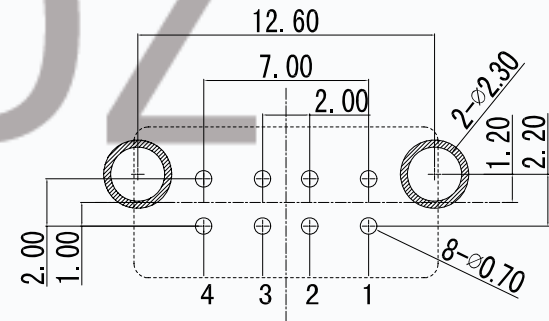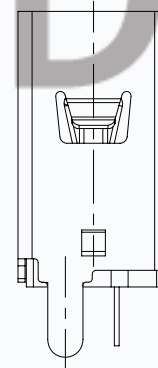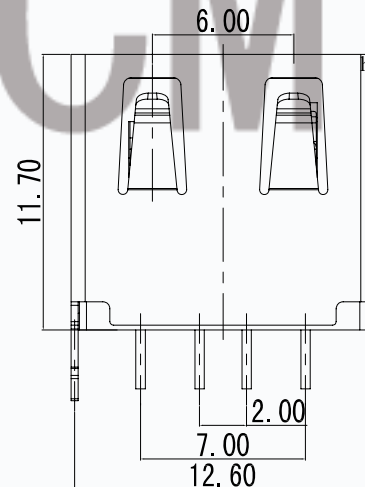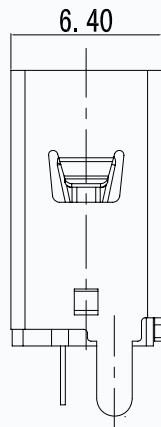

PCB LAYOUT T=1.6mm(max)
BOTTOM VIEW TOLERANCE:±0.1mm

东莞市田都科技有限公司 DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD					
TOLERANCE	TITLE	T10-2F117S-Z 双面插			
x.	±0.38	DRW	ERIC	DWG ID: PD	PROJ:
x. x	±0.25	CHK	JEFF	UNIT: mm	SHEET 1 OF 1
x. xx	±0.20	APP	DAVIE	SCALE: NO	REV 1