

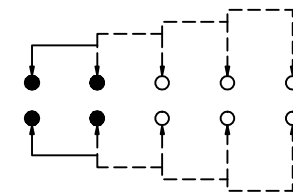
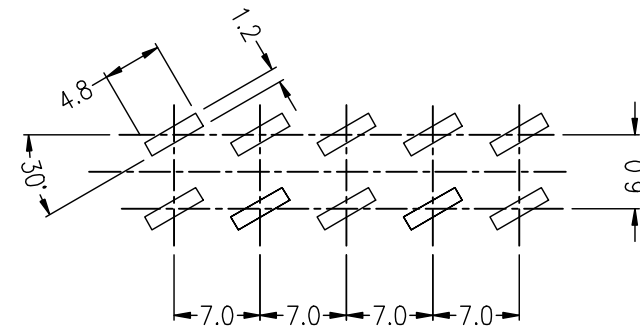
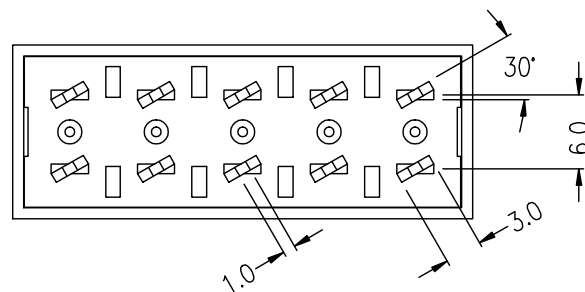
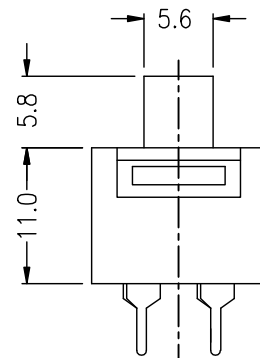


产品规格 Specifications:

Rating	3A 250VAC/6A 125VAC UL CUL CQC TUV
Contact Resistance	100mΩ MAX
Insulation Resistance	500MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	600+/-200 gf
Life test without load	10000 Cycles
Ambient Temperature Used	-25° C To 115° C

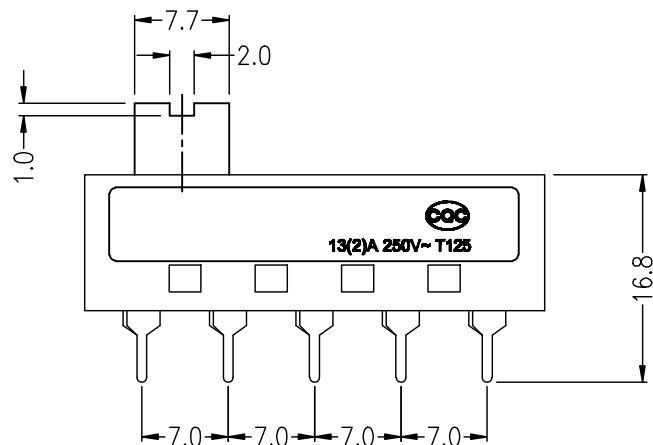

SCHEMATIC(NON-SHORTING)

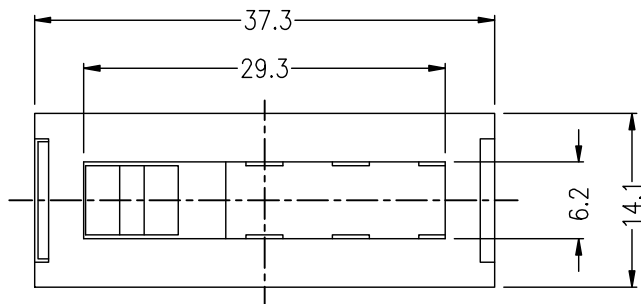

P.C.BOARD LAYOUT
BOTTOM VIEW

NO.	PARTS	MATERIALS	Q'TY	FINISHING	TOLERANCE UNLESS SPECIFIED	PROJECT AGL:	DATE	DESCRIPTIONS OF REVISION	APPD.
7	ACTUATOR	NYLON HTPA	1	BLACK	WITHIN 10.0mm : ±0.1mm OVER 10.0mm : ±0.2mm	A	2021-JUN-25	初版	
6	SPRING COIL	STAINLESS STEEL	4	NATURAL		ISSUE	DATE		
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED		PROJECT AGL:	CAD FILE: T4-247001-UG		
4	TERMINAL	COPPER ALLOY	12	Ag PLATED	TITLE : AC VERTICAL SLIDE SWITCH		UNIT : mm	P/N: 1010147090804020	
3	BASE	NYLON HTPA	1	BLACK	MODEL: T4-247001-UG5.8		SCALE: 2: 1	DWN.	
2	PLASTIC COVER	NYLON HTPA	1	BLACK	东莞市田都科技有限公司 DONG GUAN SHI TIANDU TECHNOLOGY CO., LTD			CHK'D	
1	KNOB	NYLON HTPA	1	BLACK				APPD.	