
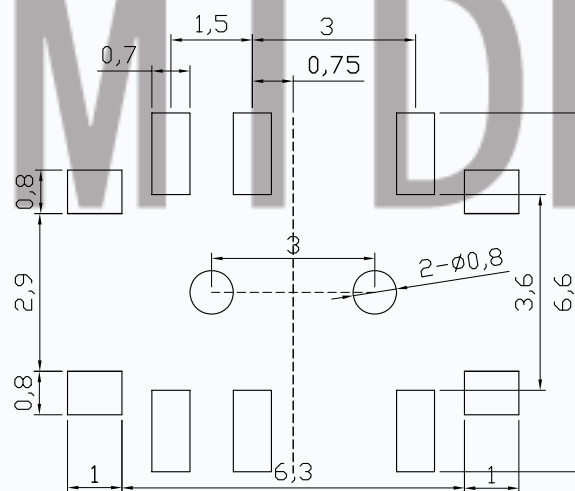
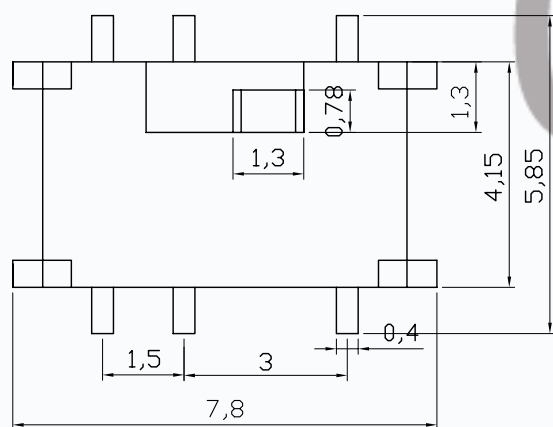
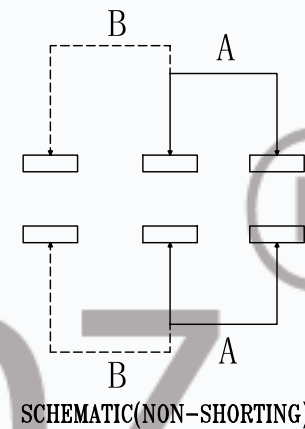
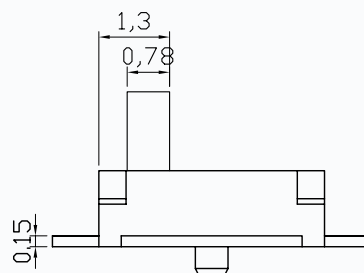
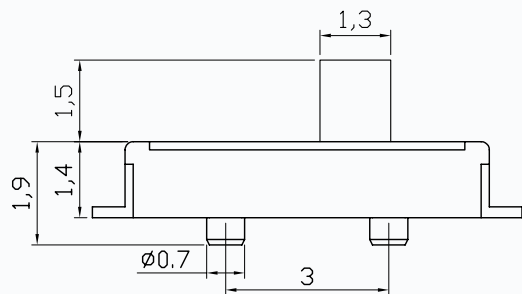


CAD FILE:T1-2210S-G

MODEL NO.	KNOB(G)
T1-2210S-G	(1.5~3)mm



SPECIFICATIONS	
Rating	DC12V 0.1A
Insulation Resistance	> 100 MΩ
Dielectric Withstanding Voltage	AC250V 50Hz/min
Contact Resistance	< 50 mΩ
Operating Force	200gf ± 20gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8									
7									
6	CLIP	COMPOUND SILVER	2	Ag PLATED	WITHIN 1.5mm : ±0.1mm	A	2014-8-29	TIANDU ELECTRONICS	
5	SPRING	SUS	1	NATURE	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	PHOSPHOR BRONZE	6	Ag PLATED	TITLE : MINI SLIDE SWITCH			UNIT : mm	DRWG NO.:CMTDDZ-T1-2210S-G
3	CASE	LCP	1	BLACK	MODEL: T1-2210S-G			SCALE:3:1	DWN. ERIC 2014-8-29
2	COVER	BRASS	1	Ag PLATED	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D MAIKD	2014-8-29
1	SLIDER	PA46	1	BLACK				APPD Coco	2014-8-29