




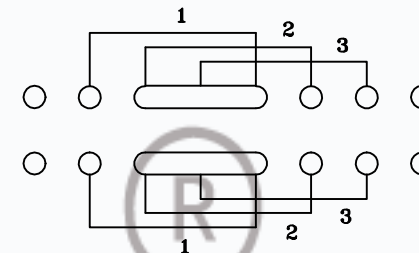


CAD FILE:T3-232018-G L2R3

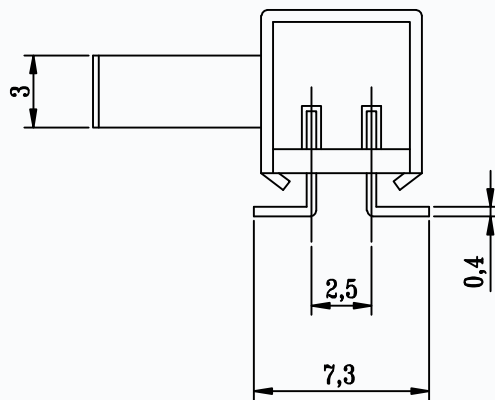


MODEL NO.	KNOB(G/VG)
T3-232018-G L2R3	(2~15)mm

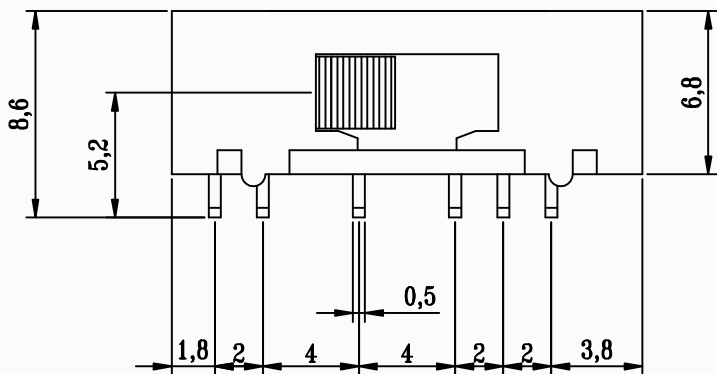

SCHEMATIC (SHORTING)

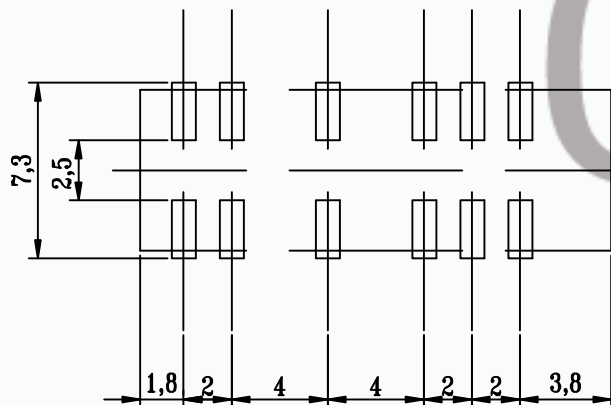

P.C.B. LAYOUT

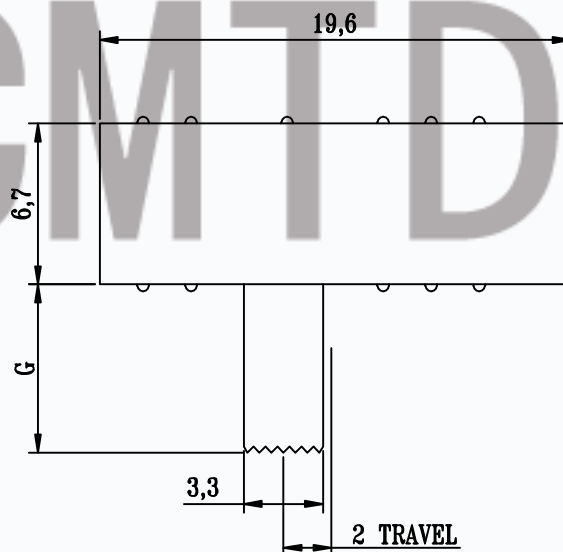

SPECIFICATIONS	
Rating	0.5A 50V DC
CIRCUIT	2P3T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	350gf ± 100gf
Operating Life	10.000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE	DESCRIPTIONS OF REVISION	APPD.
8					UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm		
7	STEEL BALL	STEEL	1	NATURAL			
6	SPRING	STEEL WIRE	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			
4	TERMINAL	BRASS STRIP	12	Ag PLATED	TITLE : HORIZONTAL SLIDE SWITCH	UNIT : mm	DRWG NO.:T3-232018-G L2R3
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: T3-232018-G L2R3	SCALE: 5:1	DWN. ERIC 2013-6-17
2	KNOB	PA66	1	BLACK	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.	CHK'D	MAIKO 2013-6-17
1	FRAME	STEEL STRIP	1	NI PLATED		APPD.	Coco 2013-6-17