

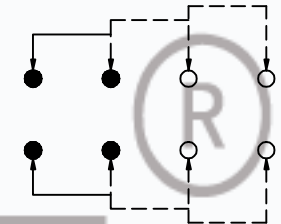
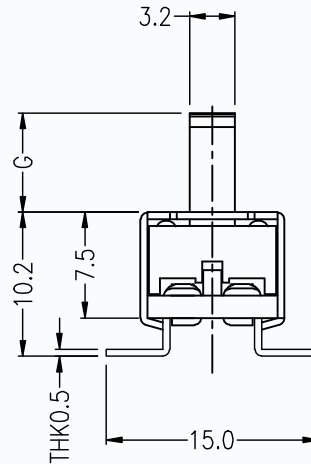
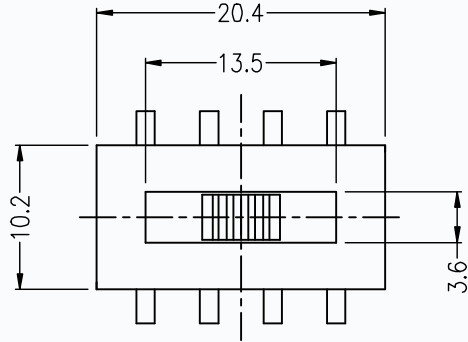


MODEL NO.	Knob(G/VG)
T4-234502AS-G	(2~15)mm

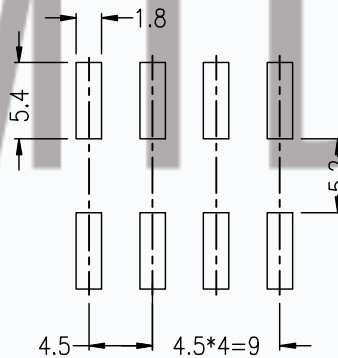

SCHMATIC(NON-SHORTING)

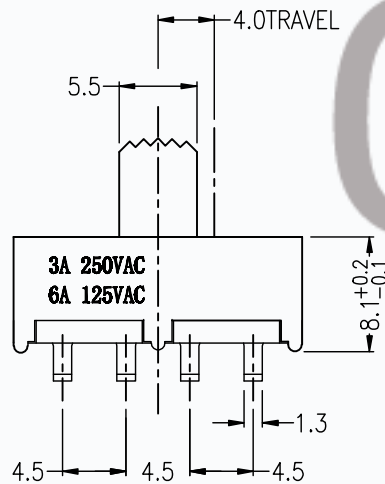

P.C.BOARD LAYOUT

Specifications:

Rating	3A 250VAC/6A 125VAC
Contact Resistance	100mΩ MAX
Insulation Resistance	100MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	300+/-100 gf
Life test without load	10000 Cycles
Ambient Temperature Used	-25° C To 105° C

NO.	PARTS	MATERIALS	Q'TY	FINISHING	TOLERANCE	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.	
8	SPRING COIL	STEEL WIRE	1	NATURAL	UNLESS SPECIFIED	A	2021-06-17	初版		
7	STEEL BALL	STEEL	1	NATURAL						
6	SPRING COIL	STEEL WIRE	4	NATURAL	WITHIN 5.0mm : ±0.1mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.	
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED	OVER 5.0mm : ±0.2mm	PROJECT AGL:				
4	TERMINAL	COPPER ALLOY	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	P/N: T4-234502AS-G		
3	BASE	LCP	1	BLACK	MODEL: T4-234502AS-G		SCALE: 2 : 1	DWN.	ERIC	2021-06-17
2	METAL COVER	STEEL STRIP	1	BLACK	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.		SCALE: 2 : 1	CHK'D	MAIKO	2021-06-17
1	KNOB	LCP	1	BLACK				APPD.	Coco	2021-06-17