






MODEL NO.	KNOB(G/VG)
T4-224504A-G	(2~15)mm

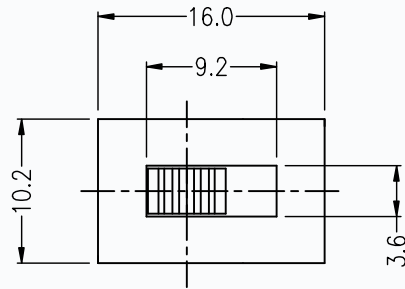

P.C.B. LAYOUT



SCHEMATIC(NON-SHORTING)

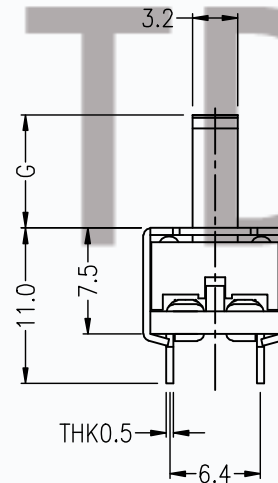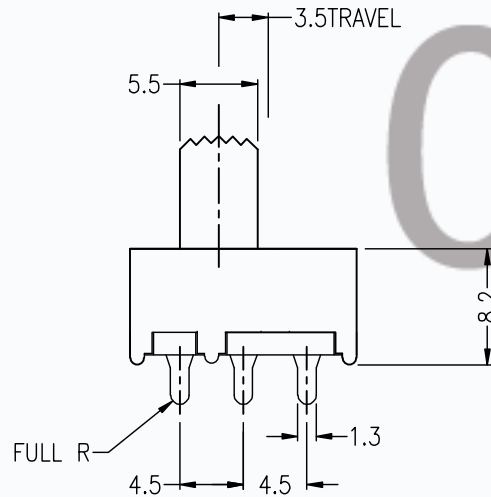

Specifications:

Rating	3A 250VAC/6A 125VAC
Contact Resistance	100mΩ MAX
Insulation Resistance	100MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	500+/-150 gf
Life test without load	6000 Cycles
Ambient Temperature Used	-25° C To 105° C

NO.	PARTS	MATERIALS	Q'TY	FINISHING	TOLERANCE	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8	SPRING COIL	STEEL WIRE	1	NATURAL	UNLESS SPECIFIED WITHIN 5.0mm : ±0.1mm OVER 5.0mm : ±0.2mm	A	2021-06-17	初版	
7	STEEL BALL	STEEL	1	NATURAL					
6	SPRING COIL	STEEL WIRE	4	NATURAL					
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED					
4	TERMINAL	COPPER ALLOY	6	Ag PLATED					
3	BOARD	HTPA	1	BLACK					
2	METAL COVER	STEEL STRIP	1	Ni PLATED					
1	KNOB	HTPA	1	RED					
					TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	T4-224504A-G
					MODEL: T4-224504A-G			SCALE: 2 : 1	DWN. ERIC 2021-06-17
					CMTDDZ 东莞市田都科技有限公司			CHK'D MAIKO 2021-06-17	
					DONGGUAN TIANDU TECHNOLOGY CO.,LTD.			APPD. Coco 2021-06-17	