

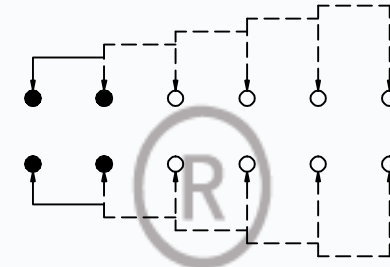
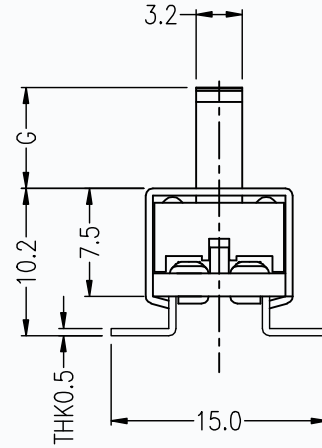
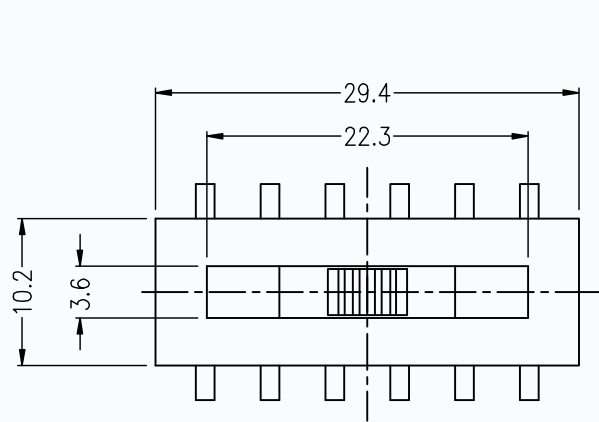


MODEL NO.	KNOB(G/VG)
T4-254002S-G	(2~15)mm

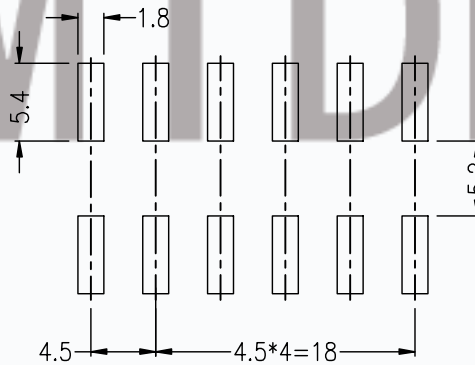

SCHEMATIC(NON-SHORTING)

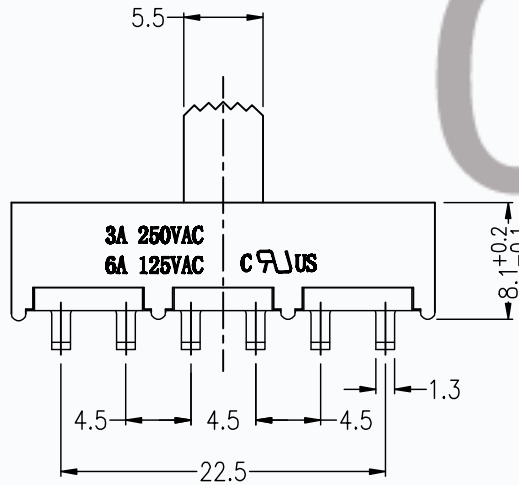

P.C.BOARD LAYOUT
BOTTOM VIEW

Specifications:

Rating	3A 250VAC/6A 125VAC UL CUL
Contact Resistance	100mΩ MAX
Insulation Resistance	500MΩ MIN
Dielectric Voltage	AC 1500V 1 Minute
Operating Force (gf)	600+/-200 gf
Life test without load	10000 Cycles
Ambient Temperature Used	-25° C To 105° C

8	STEEL BALL	STEEL	1	NATURAL	TOLERANCE UNLESS SPECIFIED	A	2021-10-28	初版	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
7	SPRING COIL	STAINLESS STEEL	1	NATURAL								
6	SPRING COIL	STAINLESS STEEL	4	NATURAL	WITHIN 10.0mm : ±0.1mm	PROJECT AGL:						
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED	OVER 10.0mm : ±0.2mm	TITLE : VERTICAL SLIDE SWITCH						
4	TERMINAL	COPPER ALLOY	12	Ag PLATED	MODEL: T4-254002S-G		UNIT : mm	P/N: T4-254002S-G				
3	PLASTIC BOARD	LCP	1	NATURAL	SCALE: 2 : 1		DWN.	ERIC	2021-10-28			
2	METAL FRAME	STEEL STRIP	1	Ni PLATED	CMTDDZ 东莞市田都科技有限公司 DONGGUAN TIANDU TECHNOLOGY CO.,LTD.		CHK'D	MAIKO	2021-10-28			
1	KNOB	LCP	1	BLACK			APPD.	Coco	2021-10-28			
NO.	PARTS	MATERIALS	Q'TY	FINISHING								