




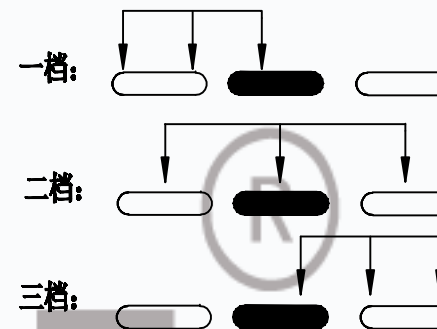



CAD FILE:

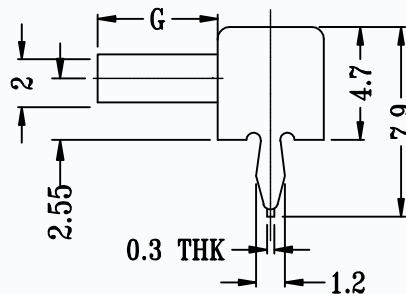

MODEL NO.	KNOB(G/VG)
T3-132002A-G	(2~9)mm

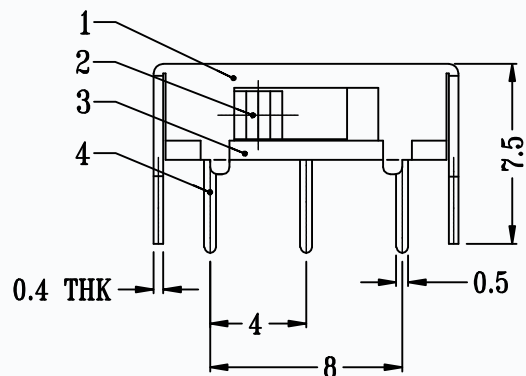

SCHEMATIC (SHORTING)

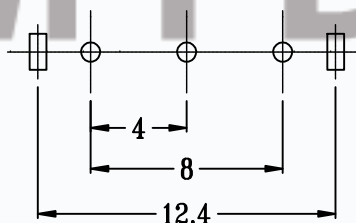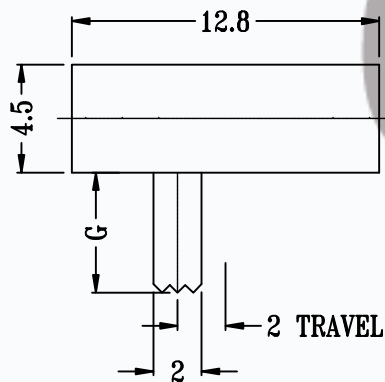

P.C.B LAYOUT
BOTTOM VIEW

SPECIFICATIONS

Rating	0.3A 50V DC
CIRCUIT	1P3T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	4	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	NI PLATED
1	KNOB	POM	1	BLACK

TOLERANCE
UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF DONGGUAN
TIANDU TECHNOLOGY CO.,LTD. AND
SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
DONGGUAN TIANDU TECHNOLOGY CO., LTD

DESCRIPTIONS OF REVISION

APPD.

TITLE : VERTICAL SLIDE SWITCH

UNIT : mm

DRWG NO.: CMTDDZ-T2-132002A-00

MODEL: T3-132002A-G

SCALE: 3:1

DWN. ERIC 2013-6-17

CMTDDZ 东莞市田都科技有限公司
DONGGUAN TIANDU TECHNOLOGY CO.,LTD.

CHK'D MAIKO 2013-6-17

APPD. Coco 2013-6-17