


REV.	MODIFICATION	ECN No.	NAME	DATE
AO	新版发行		ERIC	2016-06-18


- NOTES:
- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS304-H, T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
 - 尺寸标注事项:
 - 图示有标⊗者为首样全检, 重点管控尺寸
 - 产品符合RoHS标准

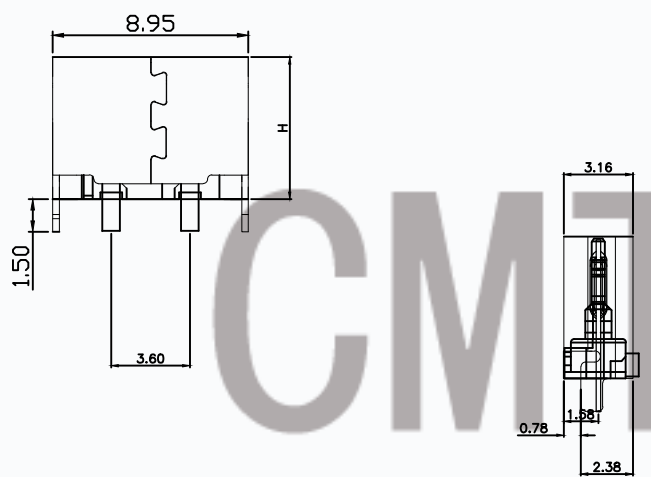

H(mm)
6.5
6.8

Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 R-H NO PLATING
	端子	TX	SUS 301 R-H Sn 80~200u"
	外壳	TX	SUS 301 R-H 电镀切料带后.

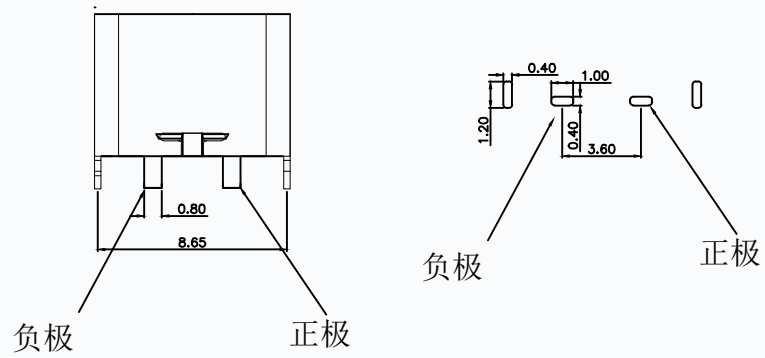

CMTDDZ 东莞市田都科技有限公司
DONGGUAN TIANDU TECHNOLOGY CO., LTD.

.X: ±0.35	.X*: ±1.5*	INTENDED USE:	TITLE:
.XX: ±0.25	.XX*: ±1.0*	CONNECTOR	TYPE-C 2P 直插母座6.5/6.8
.XXX: ±0.20	.XXX*: ±0.5*	APPD.:	PART NO.:
MAT'L.:	SEE NOTES	CHKD.:	SEE TABLE
FINISH:		DR.:	T11-02LC01-H
			SCALE: 1:1
			PAGE: 1/1
			UNIT: mm
			REV.: AO