



| REV. | MODIFICATION | ECN No. | NAME | DATE |
|------|--------------|---------|------|------------|
| A0 | △新版发行 | | ERIC | 2020-10-20 |
| | | | | |



| | |
|-----|-------------|
| B12 | GND |
| B9 | VBUS |
| B5 | CC2 |
| A5 | CC1 |
| A9 | VBUS |
| A12 | GND |
| PIN | SIGNAL NAME |

NOTES:

1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS201-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.


2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 5000 CYCLES

3.ELECTRICAL:
CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.

VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:
图示有标示“⊗”者为首样全检, 重点管控尺寸
6. 产品符合RoHS标准。

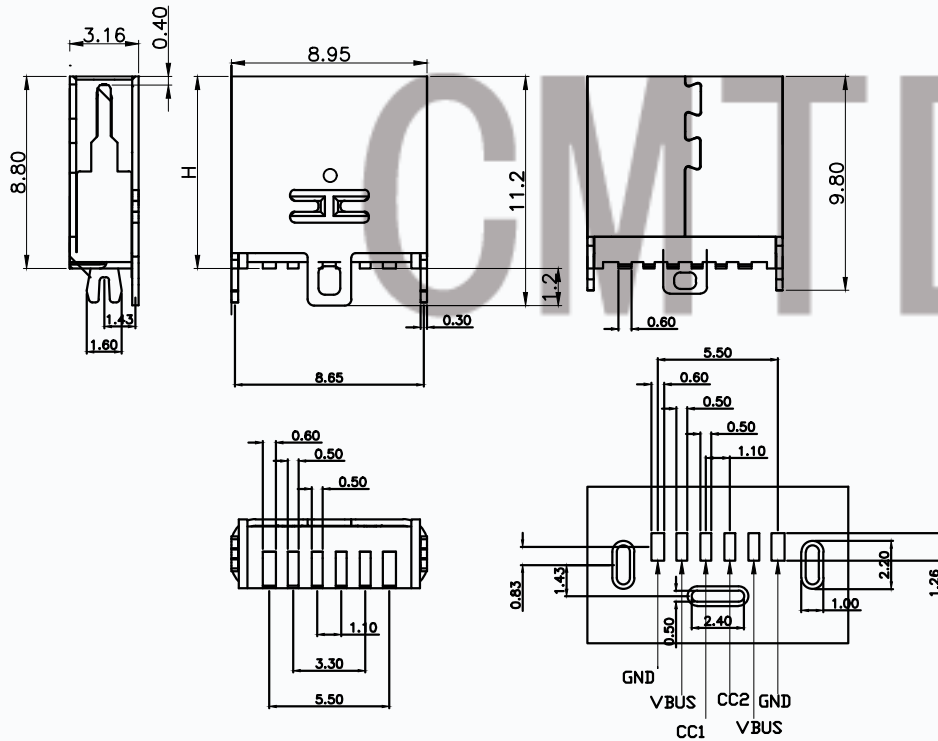

| H(mm) |
|-------|
| 8.8 |
| 9.3 |

CMTDDZ 东莞市田都科技有限公司
DONGGUAN TIANDU TECHNOLOGY CO., LTD.

| | | | |
|-------------|--------------|---------------|---------------------------------|
| .X: ±0.35 | .X': ±1.5' | INTENDED USE: | TITLE: |
| .XX: ±0.25 | .XX': ±1.0' | CONNECTOR | USB TYPE C 6PIN PLUG 简易版立贴9 . 3 |
| .XXX: ±0.20 | .XXX': ±0.5' | APPD.: | PART NO.: |
| MAT'L.: | SEE NOTES | CHKD.: | SEE TABLE |
| FINISH: | | DR.: | DWG. NO.: |
| | | | T11-06LS02-H |
| | | | SCALE: 1:1 |
| | | | PAGE: 1/1 |
| | | | UNIT: mm |
| | | | REV.: A0 |