

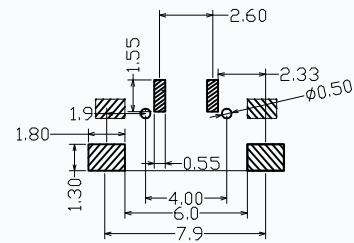





REV.	MODIFICATION	ECN No.	NAME	DATE
A	新版发行		ERIC	2018.06.10



RECOMMENDED P.C.B LAYOUT (TOP VIEW)
DEFAULT TOLERANCE: ±0.05



规格书: Specifications:

电气性能: Electrical:

- 额定电流: Current Rating
3.0A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 介电强度: Dielectric Withstanding Voltage:
100 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
100MEGA ohms MIN

机械性能: Mechanical:

- 连接器配合力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子拉力: Terminal Retention
0.5kgf(MIN)

材料: Material:

- 外壳: Housing:
High Temperature Plastic,
LCP White/Black
- 端子: Contact: Copper Alloy C2680/c5191
- 壳体: Shell: Copper Alloy C2680/SUS

表面处理: Finished:

- 端子: Contact: Plated Gold in Mating Area;
Matte Tin On Solder Tails
- 壳体: Shell:
Plated Matte tin, Salt spray test: 24 hours

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

.X: ±0.20	.X': ±1.5'	INTENDED USE:	TITLE:
.XX: ±0.10	.XX': ±1.0'	CONNECTOR	MICRO 2P/F 1.2mm
.XXX: ±0.05	.XXX': ±0.5'	APPD.:	PART NO.: SEE TABLE
MAT'L.: SEE NOTES		CHKD.:	DWG. NO.: T10-05FB20
FINISH:		DR.: ERIC	SCALE: 1:1 PAGE: 1/1
			UNIT: mm REV.: A