

规格说明: Specifications:

1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention  
1.0kgf(MIN)

1. 塑胶: Housing:

Hing Temperature Thermoplastics,

2. 端子: Contact: Copper Alloy C2680



3. 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area  
Tin On Solder Talls

端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

铜壳四周镀80U”(MIN)锡

Nickel Plating

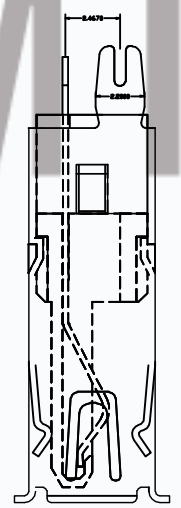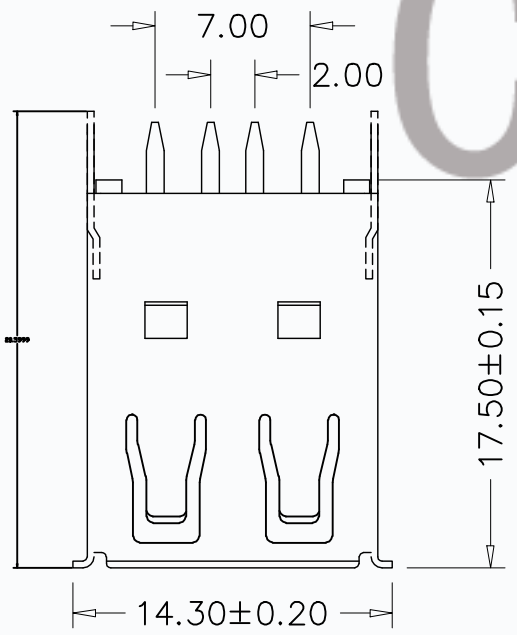

6.90±0.20

成品图 MANUFACTURE DWG		<b>CMTDDZ 东莞市田都科技有限公司</b> Dongguan TianDu Technology Co. Ltd.									
公差一览表 TOLERANCE UNLESS OTHERWISE											
.X±0.15	X.±5'	日期 DATE	2016-06-10	单位 UNIT	MM	制图 DRAWING		DWG NO.	T10-2F175-180-J-Y-01		
.XX±0.05	.X±2'	审核 CHECKED		比例 SCALE	1:1	设计 DESIGN	ERIC	品名 NAME	USB A/P 180x 17.5MM		
.XXX±0.02	.XX±1'	核准 APPROVE		角法 VIEW	⊕			版本 VER	A	页数 SHEET	PG1