

RoHS 客户图






目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

PIN ASSIGNMENT:



A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
				SBU2	D-	D+	CC2				

NOTE:

- MATERIAL & FINISH SEE TABLE;
- RATINGS
 - CURRENT RATING :3A.
 - VOLTAGE RATING: 5V AC.
 - OPERATING TEMPERATURE: -40°- 85°C
- CHARACTERISTIC:
 - CONTACT RESISTANCE: 40mOHM MAX.(INITIAL),
50mOHM MAX.(FINAL)
 - INSULATION RESISTANCE:100MOHMS MIN.@500VDC
 - DIELECTRIC WITHSTANDING VOLTAGE:100VAC/1MINUTE
 - MATING FORCE: 5-20N;
 - WITHDRAWAL FORCE: 8-20N.(BEFORE:1,000 CYCLES);
6-20N.(AFTER:1,000 CYCLES);
 - DURABILITY: 5,000 CYCLES
- HARMFUL MATERIAL CONTROL FOLLOWN RoHS 2011/65/EU.
- CRITICAL DIMENSIONS MARKED "▼" SHOULD CHECK BY QC.
- PLEASE CONTACT XINFENGLEI SALES REPRESENTIVE TO VERIFY PRODUCT DETAILS.

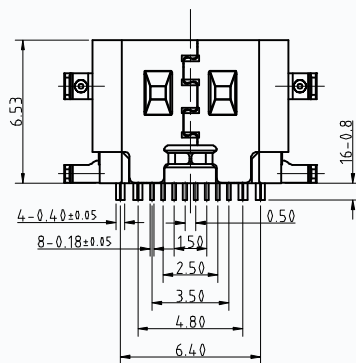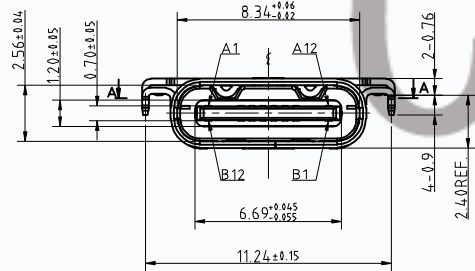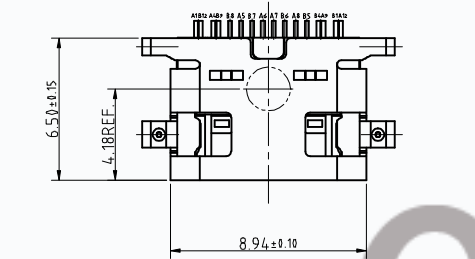

SECTION A-A

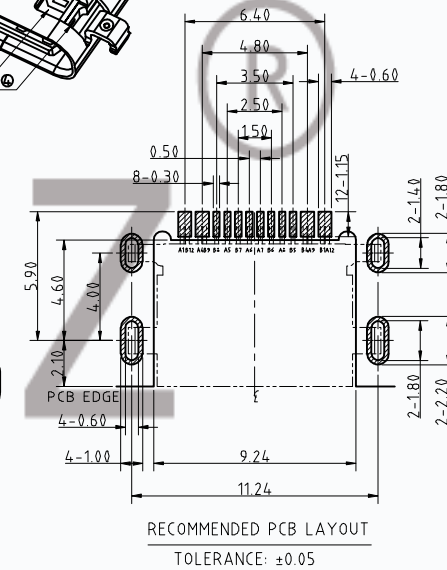

4	METAL-PAD	STAINLESS STEEL	NICKEL UNDER PLATED OVERALL.
3	HOUSING	THERMOPLASTICS	COLOR SEE PART NO.,UL94V-0
2	SHELL	STAINLESS STEEL	NICKEL UNDER PLATED OVERALL.
1	TERMINAL	COPPER ALLOY	NICKEL UNDER PLATED OVERALL. GOLD FLASH ON CONTACT AREA Au PLATING ON SOLDER TAILS
ITEM	PART NAME	MATERIAL	DESCRIPTION

产品图 PRODUCT CHART DWG		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	DAVID	产品料号 PRODUCT PART NO.	T11-16CB06-2.4H
X	±0.30	X'	±5'	比例 SCALE	1:1	审核 CHKD	ERIC
.X	±0.25	.X'	±2'	日期 DATE	2009/10/20	核准 APPD	JEFF
.XX	±0.30	.XX'	±1'	角法 VIEW	角法	版本 VER	A0
.XXX	±0.15	.XXX'	±0.5'				